







**AB-SF IRC** 

**AB-SF IR** 

**AB-SF IRR** 

#### **CHARACTERISTICS AND APPLICATIONS**

- It allows quick Installation and easy assembly.
- Used for low loads.
- AISI 430 stainless steel.
- AISI 201 clip with zinc plated screw
- Indicated for installations of heating, ventilation or air pipes.

#### **VALID FOR**







Ref. **FT ABSF-en** Rev: 1 **19/07/21 1** de **4** 

## **TECHNICAL DATASHEET**



1. RANGE									
ITEM	CODE	РНОТО	MEASURES [mm]	DESCRIPTION	MATERIAL				
1	AB-SF IRC	A contract of the second		Non-perforated band clip	ENOX AISI 201				
2	AB-SF IR		9x3000	The pack includes a 3 meter non-perforated band and 8 clips	ENOX AISI 430				
3	AB-SF IRR	The same of the sa	9x30000	30 meter non-perforated band roll	ENOX AISI 430				

Ref. **FT ABSF-en** Rev: 1 **19/07/21 2** de **4** 



## 2. INSTALLATION DATA

# **AB-SF**


#### **Stainless Steel Non Perforated Band**








Installation data								
CODE	ASFIRCA	ASFIR03	ASFIR30					
L: Band Length	[m]		3	30				
A: Band Width			9	9				
B: Band Thickness		0,5 ÷ 0,6						
Installation bit		PH2						

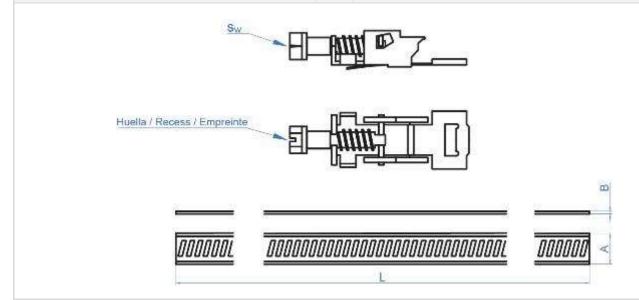

Ref. **FT ABSF-en** Rev: 1 **19/07/21 3** de **4** 



# 3. INSTALLATION PROCEDURE




### 1. Place y Rotate

Insert the band into the clip and rotate the clip in the direction of the band.



#### 2. Measure and cut

Place the band around the pipe and cut the necessary sheet metal band.



### 3. Tight

Tighten the non-perforated band to fit the band to the pipe diameter.

Ref. FT ABSF-en Rev: 1 19/07/21 4 de 4