


### PSE-UN

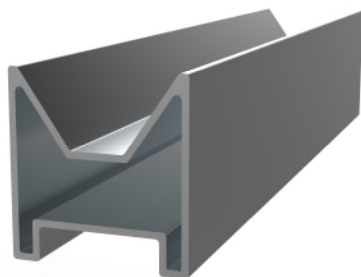

### PRODUCT DESCRIPTION

- Connector for aluminium profile for assembled fixing


### CHARACTERISTICS

- Profile for the lengthwise joining of PSE-A profiles.
- Extruded 6063-T6 aluminium alloy profile.
- For outside use.
- Interior coupling for PSE-A profiles without interfering with any operations
- 200 mm length for a strong joint.

### ASSESSMENTS



### ASSEMBLY APPLICATIONS/ACCESSORIES



PSE-A




ABEI5519

Used in **coplanar and triangular aluminium installation systems** for the lengthwise joining of **PSE-A** "aluminium profile for assembled fixing".

Its specific design allows profiles to be joined via their central cavity without interfering with any operations.

The fixing of profiles to joints is via stainless steel A2-70 **ABEI5519** "DIN-7504-K self-drilling screws". These screws are easily positioned thanks to the grooves in the sides of the profiles.

### APPLICATION EXAMPLE

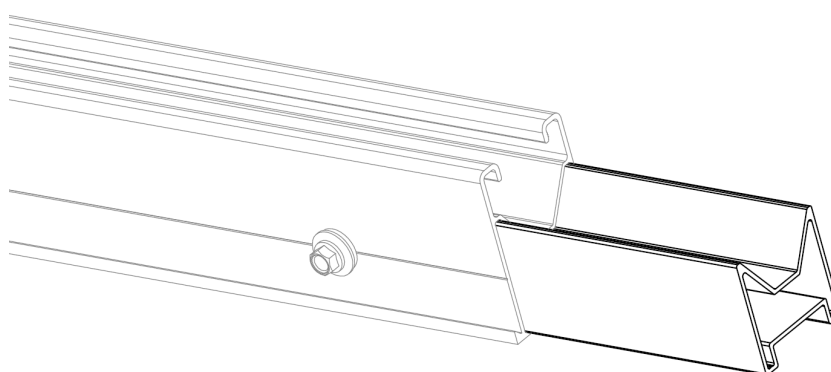

Application example 1: Lengthwise joining of PSE-A profiles.

## 1. RANGE

ITEM	CODE	PHOTO	DESCRIPTION	LENGTH	MATERIAL
1	PSEUN60200		Connector for aluminium profile for assembled fixing	200 mm	

## 2. INSTALLATION INFORMATION


### 2.1 PSE-UN Connector for aluminium profile for assembled fixing.

	<b>Material</b>	<b>Compatible with</b>	<b>Assembly accessories</b>
	<p>6063-T6 aluminium</p>	<p>PSE-A Aluminium profile for assembled fixing</p>	<p>ABE15519 A2 DIN-7504-K bolt</p>

Measurement table

Code	A (mm)	B (mm)	C (mm)	E1 (mm)	L (mm)
PSEUN60200	38.3	40.2	7.5	1.5	200

Drawing

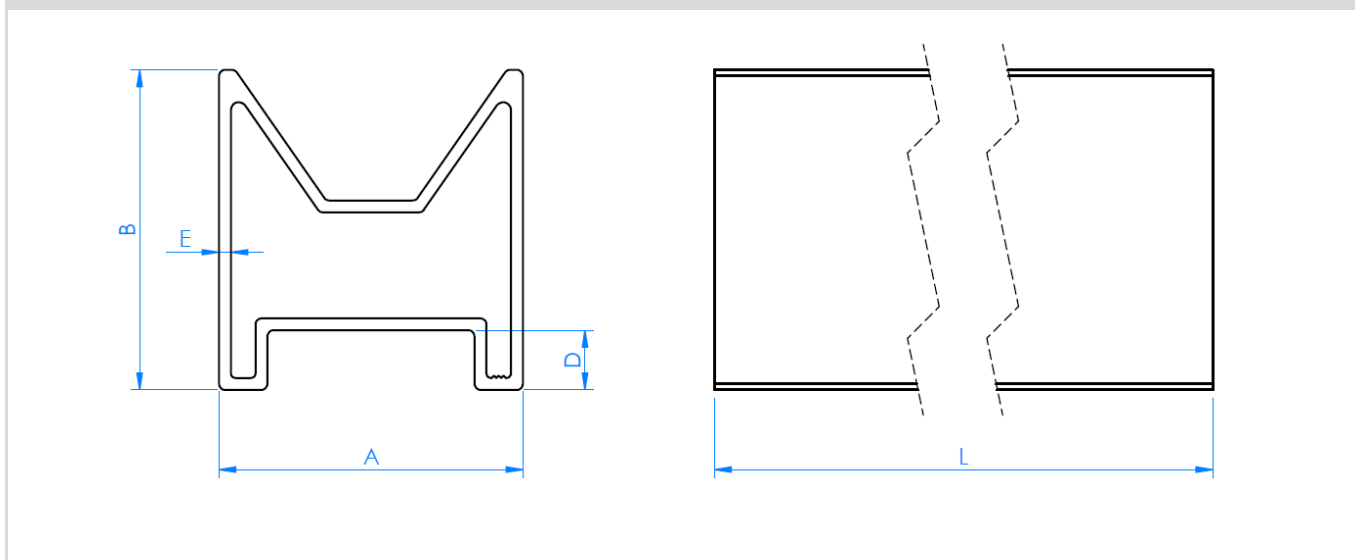

Mechanical properties of the material

	Yield strength $F_{y0.2}$ (N/mm <sup>2</sup> )	Ultimate load $F_u$ (N/mm <sup>2</sup> )	Elastic modulus $E$ (N/mm <sup>2</sup> )	Transverse elastic modulus $G$ (N/mm <sup>2</sup> )	Linear expansion coefficient $\alpha_L$ ( $\mu\text{m/mK}$ )	Specific weight $\rho$ (kg/m <sup>3</sup> )
EN AW-6063-T6 aluminium	170	215	69,500	26,100	23.5	2,700

Mechanical properties of the profile.

	Area $S$ (cm <sup>2</sup> )	Moment of inertia $I_x$ (cm <sup>4</sup> )	Moment of inertia $I_y$ (cm <sup>4</sup> )	Section modulus $W_x$ (cm <sup>3</sup> )	Section modulus $W_y$ (cm <sup>3</sup> )	Linear weight $W$ (kg/m)
<p>PSE-UN</p>	2.78	4.17	6.1	1.98	3.18	0.75