

TPA-R



PRODUCT DESCRIPTION

- Pre-assembled and adjustable aluminium triangle


CHARACTERISTICS

- Inclined structure for installation of roof-mounted solar panels.
- Pre-assembled product.
- Includes two long profiles that make up the structure, an upper section and a base, both manufactured from EN AW 6005-T6 extruded aluminium.
- Includes two base support sections, both manufactured from EN AW 6005-T6 extruded aluminium.
- Includes three **DIN-6921 M8x50** bolts and three **DIN-6923 M8** nuts in A2-70 stainless steel.
- For outside use.
- Designed for **triangular aluminium systems** with **PSE-A** and **PSE-C** format continuous profiles.
- Three assembly positions with 25°, 30° and 35° inclinations.
- Secure folding position with incorporated fixture.
- Optimum strength with an inclination of 25°.
- Option of vertically mounting solar panels to a height of up to two metres.
- Central upper profile groove compatible with SW13 hexagonal socket.
- Option for triangles in sizes manufactured to order on request.

ASSESSMENTS




APPLICATIONS/MOUNTING ACCESSORIES



PSE-A



KFSFLM08



PSE-C



KFSFCM08

These are used in **triangular aluminium installation systems** as an inclined structural element onto which continuous profiles can be mounted. Solar panels are finally attached to and supported by these profiles.

- To attach **PSE-A** profiles to triangles, two **KFSFLM08** “cross connector for lateral fixing” are used.
- To attach **PSE-C** profiles to triangles, two **KFSFCM08** “cross connector for lateral fixing” are used.



TPA-P



ABEI5519

If it is necessary to install braces between adjoining triangles, **TPA-P** “strut profiles for pre-assembled aluminium triangles” should be used. Strut profiles are diagonally attached to profile bars of the two corresponding triangles using **ABEI5519** A2-70 stainless steel self-drilling screws.

FIXING SYSTEM/ASSEMBLY ACCESSORIES

Mounting on profile structures/Application example 1


FIXING SYSTEM			ACCESSORIES		
	PSE-A Aluminium profile for assembled fixing	PSE-C Aluminium profile for assembled fixing		TURXA208 INDEXTRUT quick nut	6921108020 A2 stainless steel DIN-6921 bolt

BASE MATERIAL/DIRECT MOUNTING


See technical data sheet:

- ST-PSE triangular installation system with PSE-A aluminium profile
- ST-PSC triangular installation system with PSE-C aluminium profile

APPLICATION EXAMPLES

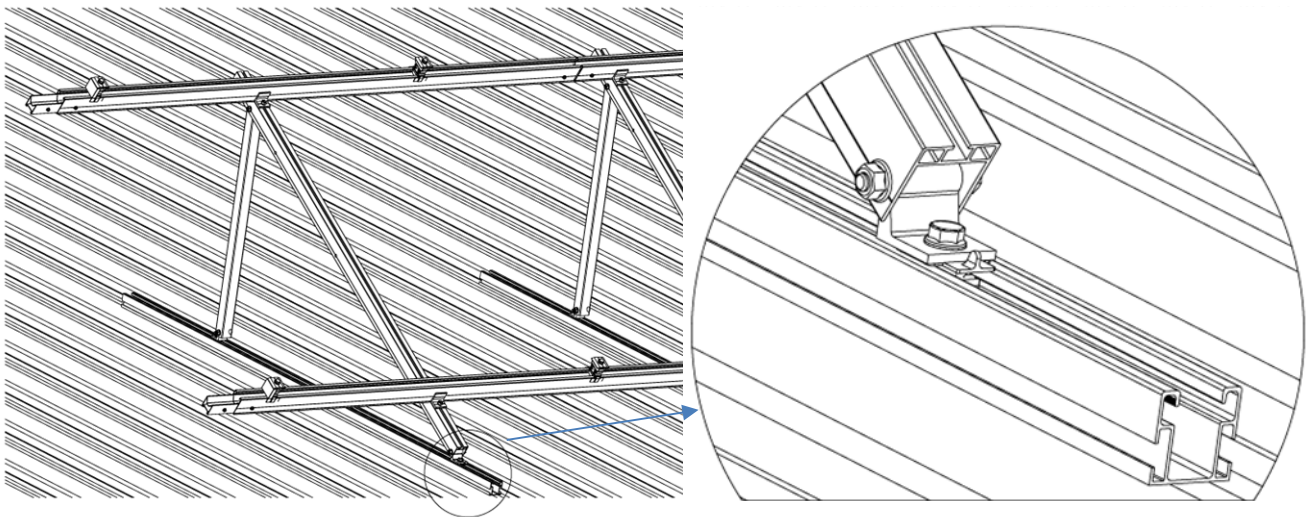

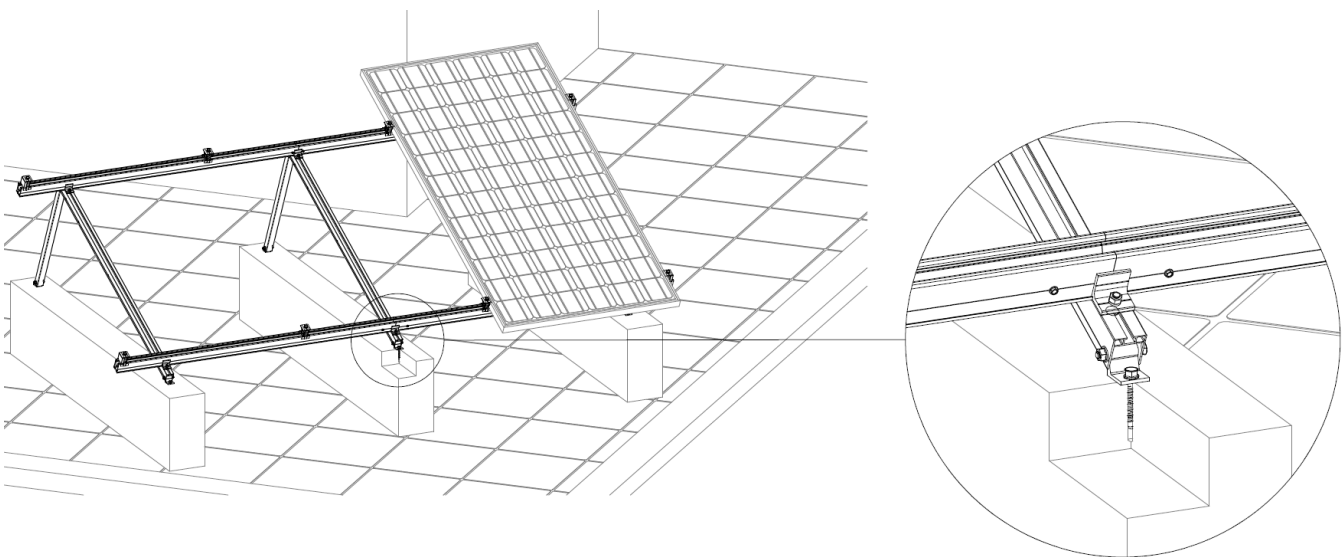


Application example 1: Assembly on PSE-C profile attached to sandwich panel roof sub-structure



Application example 2: Direct mounting on concrete tie beams
















1. RANGE

ITEM	CODE	PHOTO	DESCRIPTION	ANGLE	LENGTH	MATERIAL
1	TPAR251500		Pre-assembled and adjustable aluminium triangle	25°	1500 mm	 AW 6005-T6
				30°		 A2-70
				35°		

2. INSTALLATION INFORMATION

2.1 TPA-R


Pre-assembled and adjustable aluminium triangle

	Materials  AW 6005-T6  A2-70		Compatible  PSE-A  PSE-C Aluminium profile for assembled fixing.		Assembly accessories  KFSFLM08  KFSFCM08 Cross connector for lateral fixing.		 ABE15519 A2 DIN-7504K stainless steel  TPA-P Strut profile for TPA-R	
	Fixing systems  PSE-A Aluminium profile for assembled fixing  PSE-C Aluminium profile for assembled fixing						Assembly accessories  6921108020 A2 DIN-6921 stainless steel  TURXA208 Quick nut	
	BASE MATERIAL/FIXING See technical data sheet: <ul style="list-style-type: none"> ST-PSE: Triangular installation system with PSE-A aluminium profile. ST-PSC: Triangular installation system with PSE-C aluminium profile. 						 PMO / PMO-L Plate for double threaded screws  STR Adjustable support for trapezoidal roof	

Measurement table 1

Code	A (mm)	B (mm)	C (mm)	D (mm)	E1 (mm)	E2 (mm)	F (mm)	G (mm)	H (mm)	L1 (mm)	L2 (mm)
TPAR251500	40	45	35	37	2	2	10	5	10	1500	710


Drawing

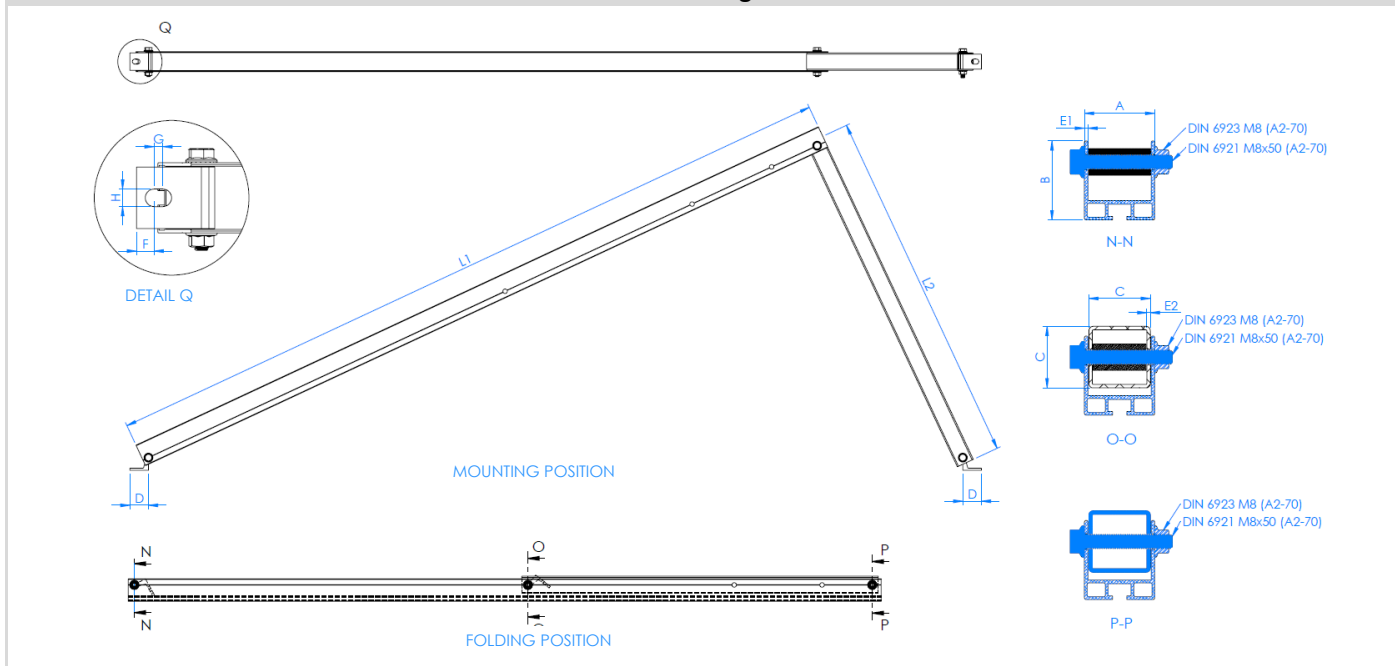

Measurement table 2

Code	Position 1			Position 2			Position 3		
	β (°)	Ls (mm)	Lb (mm)	β (°)	Ls (mm)	Lb (mm)	β (°)	Ls (mm)	Lb (mm)
TPAR251500	25	18	1696	30	118	1260	35	293	1052




Drawing

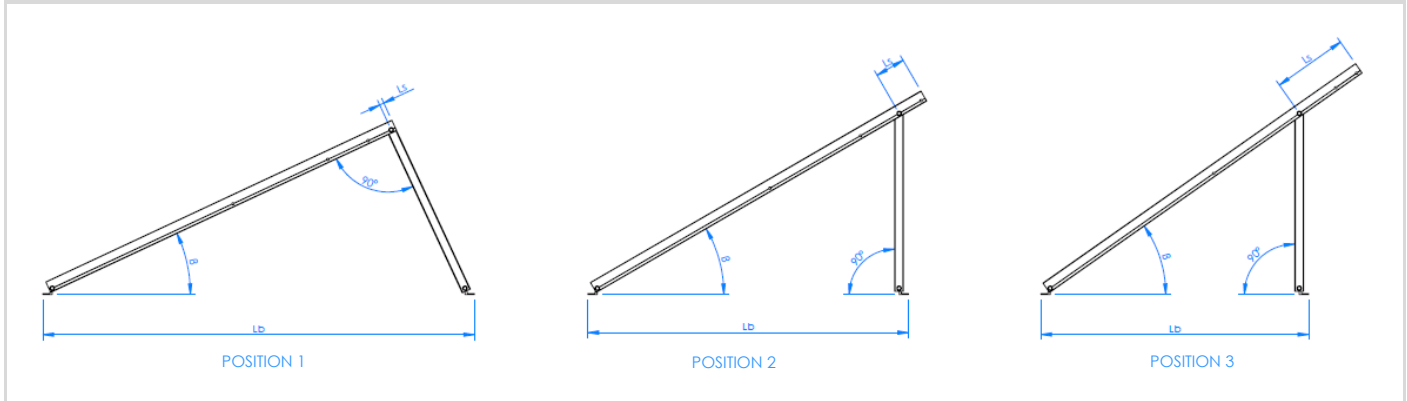

Mechanical properties of the material

	Yield strength $F_{y0.2}$ (N/mm ²)	Ultimate load F_u (N/mm ²)	Elastic modulus E (N/mm ²)	Transverse elastic modulus G (N/mm ²)	Linear expansion coefficient α ($\mu\text{m}/\text{C}^\circ$)	Specific weight ρ (kg/m ³)
EN AW6005-T6 aluminium	225	270	69,500	26,200	23.3	2,710
A2-70 stainless steel	450	700	210,000	81,000	17.3	7,850

Mechanical properties of the profile.

	Area S (cm ²)	Moment of inertia I_x (cm ⁴)	Moment of inertia I_y (cm ⁴)	Section modulus W_x (cm ³)	Section modulus W_y (cm ³)	Linear weight W (kg/m)
 Upper profile	3.01	5.15	7.52	1.76	3.76	0.81
 Profile bar	2.59	4.66	4.66	2.66	2.66	0.7
 Profile foot	3.91	3.99	4.66	1.94	1.61	1.04