



Vinylester mortar anchor, for use in non-cracked concrete

MO-V

Assessed ETA Option 7 (non-cracked concrete).



PRODUCT INFORMATION

DESCRIPTION

Vinylester chemical anchor.

OFFICIAL DOCUMENTATION

- ETA 13/0753 option 7, M8 to M24 for non-cracked concrete.
- Declaration features DoP MO-V.
- Certificate EVCP 1020-CPR-090-041424 for use in concrete.

VALID FOR



Stud

DIMENSIONS

Stud M8 - M24

RANGE OF CACULATION LOADS

From 13.4 to 66.0 kN (non-cracked).

BASE MATERIAL

Concrete quality C20/25 to C50/60 non-cracked.




Concrete

ASSESSMENTS

- ETA 13/0753 Option 7: non-cracked concrete.



DRILL HOLE CONDITION



Dry Wet Flooded

CHARACTERISTICS AND BENEFITS

- Easy installation.
- For use in non-cracked concrete,
- Used for high loads.
- Temperature range -40°C to +80°C (maximum long-term temperature +50°C).
- Variety of lengths and diameters: M8-M24-assessed studs, flexible assembly.
- For static or quasi-static loads.
- Version in zinc plated steel, stainless steel A2 and A4.
- Available in INDEXcal.



MATERIALS

Standard stud:

Carbon steel 5.8, 8.8.



Stainless standard stud:

Stainless steel A2-70 and A4-70.



APPLICATIONS

- For indoor and outdoor use.
- Structural applications.
- Safety barriers.
- Fixing of road fences.
- Fixing of posters, machinery, boilers, signs, billboards, etc.





CONCRETE INSTALLATION PARAMETERS


METRIC			M8	M10	M12	M16	M20	M24
d_0	nominal diameter	[mm]	10	12	14	18	22	26
d_f	diameter in anchor plate \leq	[mm]	9	12	14	18	22	26
T_{inst}	tightening torque \leq	[Nm]	10	20	40	80	150	200
Circular cleaning brush			Ø14		Ø20		Ø29	

$h_{ef,min} = 8d$								
h_1	depth of the drill hole	[mm]	64	80	96	128	160	192
$s_{cr,N}$	critical distance between anchors	[mm]	192	240	288	384	480	576
$c_{cr,N}$	critical distance from the edge	[mm]	96	120	144	192	240	288
c_{min}	minimum distance from the edge	[mm]	35	40	50	65	80	96
s_{min}	minimum distance between anchors	[mm]	35	40	50	65	80	96
h_{min}	minimum concrete thickness	[mm]	100	110	126	158	204	244

Standard stud								
h_1	depth of the drill hole	[mm]	80	90	110	128	170	210
$s_{cr,N}$	critical distance between anchors	[mm]	240	270	330	384	510	630
$c_{cr,N}$	critical distance from the edge	[mm]	120	135	165	192	255	315
c_{min}	minimum distance from the edge	[mm]	43	45	56	65	85	105
s_{min}	minimum distance between anchors	[mm]	43	45	56	65	85	105
h_{min}	minimum concrete thickness	[mm]	110	120	140	158	214	262

$h_{ef,max} = 12d$								
h_1	depth of the drill hole	[mm]	96	120	144	192	240	288
$s_{cr,N}$	critical distance between anchors	[mm]	288	360	432	576	720	864
$c_{cr,N}$	critical distance from the edge	[mm]	144	180	216	288	360	432
c_{min}	minimum distance from the edge	[mm]	50	60	70	95	120	145
s_{min}	minimum distance between anchors	[mm]	50	60	70	95	120	145
h_{min}	minimum concrete thickness	[mm]	126	150	174	222	284	340

Zinc-plated stud code 5.8 / 8.8	EQAC08110 EQ8808110	EQAC10130 EQ8810130	EQAC12160 EQ8812160	EQAC16190 EQ8816190	EQAC20260 EQ8820260	EQAC24300 EQ8824300
Stainless steel stud code A2 / A4	EQA208110 EQA408110	EQA210130 EQA410130	EQA212160 EQA412160	EQA216190 EQA416190	EQA220260 EQA420260	EQA224300 EQA424300

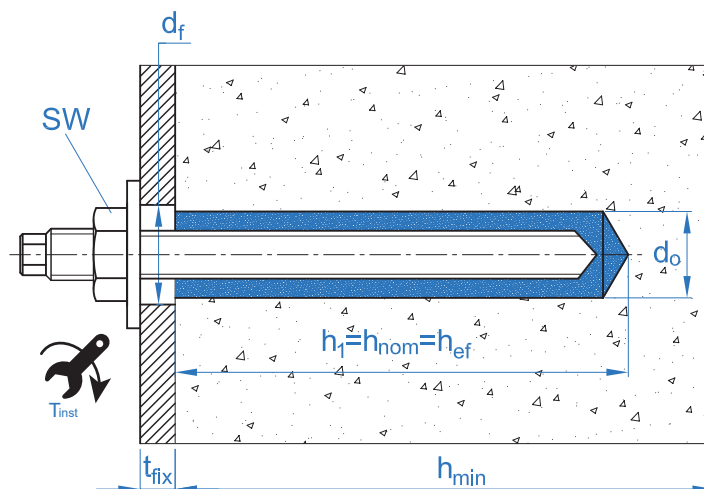



INSTALLATION ACCESSORIES			INSTALLATION PROCEDURE
CODE	PRODUCT	MATERIAL	CONCRETE
MOPISSI	APPLICATION GUNS	Gun for 300 ml cartridges	
MOPISTO		Guns for 410 ml cartridges, professional use	
MOPISNEU		Pneumatic gun for 410 ml coaxial cartridges, professional use	
EQ-AC EQ-8.8 EQ-A2 EQ-A4	STUD	Studs threaded steel, class 5.8 ISO 898-1 Studs threaded steel, class 8.8 ISO 898-1 Studs stainless steel A2-70 Studs stainless steel A4-70	
MORCEPKIT	CLEANING BRUSHES	Kit with 3 cleaning brushes measuring $\phi 14$, $\phi 20$ and $\phi 29$ mm	
MOBOMBA	CLEANING PUMP	Pump for cleaning leftover dust and fragments in the drill hole	
MORCANU	MIXING TUBE	Plastic. Static labyrinth mixture	

MINIMUM CURING TIME			
TYPE	BASE MATERIAL TEMPERATURE [°C]	HANDLING TIME [min]	CURING TIME [min]
MO-V	min +5	18	120
	+5 to +10	12	120
	+10 to +20	6	80
	+20 to +25	4	40
	+25 to +30	3	30
	+30 to +35	2	20
	+35 to +40	1.5	15
	40	1.5	10



Resistance in concrete C20/25 for an insulated anchor, without effects of distance from the edge or spacing between anchors, with a standard stud EQ-AC, EQ-8.8, EQ-A2 or EQ-A4

Characteristic tensile strength N_{Rk}								
Metric			M8	M10	M12	M16	M20	M24
N_{Rk}	Zinc-plated stud 5.8	[kN]	<u>18,0</u>	28,2	49,7	64,3	90,7	118,7
	Zinc-plated stud 8.8	[kN]	24,1	28,2	49,7	64,3	90,7	118,7
	Stainless steel stud (A2/A4)	[kN]	24,1	28,2	49,7	64,3	90,7	118,7
Calculated tensile strength N_{Rd}								
Metric			M8	M10	M12	M16	M20	M24
N_{Rd}	Zinc-plated stud 5.8	[kN]	<u>12,0</u>	15,7	27,6	35,7	50,4	65,9
	Zinc-plated stud 8.8	[kN]	13,4	15,7	27,6	35,7	50,4	65,9
	Stainless steel stud (A2/A4)	[kN]	13,4	15,7	27,6	35,7	50,4	65,9
Maximum recommended tensile load N_{rec}								
Metric			M8	M10	M12	M16	M20	M24
N_{rec}	Zinc-plated stud 5.8	[kN]	<u>8,5</u>	11,2	19,7	25,5	36,0	47,1
	Zinc-plated stud 8.8	[kN]	9,5	11,2	19,7	25,5	36,0	47,1
	Stainless steel stud (A2/A4)	[kN]	9,5	11,2	19,7	25,5	36,0	47,1
Characteristic resistance to shear stress V_{Rk}								
Metric			M8	M10	M12	M16	M20	M24
V_{Rk}	Zinc-plated stud 5.8	[kN]	<u>9,0</u>	<u>15,0</u>	<u>21,0</u>	<u>39,0</u>	<u>61,0</u>	<u>88,0</u>
	Zinc-plated stud 8.8	[kN]	<u>15,0</u>	<u>23,0</u>	<u>34,0</u>	<u>63,0</u>	<u>98,0</u>	<u>141,0</u>
	Stainless steel stud (A2/A4)	[kN]	<u>13,0</u>	<u>20,0</u>	<u>30,0</u>	<u>55,0</u>	<u>86,0</u>	<u>124,0</u>
Calculated resistance to shearing V_{Rd}								
Metric			M8	M10	M12	M16	M20	M24
V_{Rd}	Zinc-plated stud 5.8	[kN]	<u>7,2</u>	<u>12,0</u>	<u>16,8</u>	<u>31,2</u>	<u>48,8</u>	<u>70,4</u>
	Zinc-plated stud 8.8	[kN]	<u>12,0</u>	<u>18,4</u>	<u>27,2</u>	<u>50,4</u>	<u>78,4</u>	<u>112,8</u>
	Stainless steel stud (A2/A4)	[kN]	<u>8,3</u>	<u>12,8</u>	<u>19,2</u>	<u>35,3</u>	<u>55,1</u>	<u>79,5</u>
Maximum recommended load to shear stress V_{rec}								
Metric			M8	M10	M12	M16	M20	M24
V_{rec}	Zinc-plated stud 5.8	[kN]	<u>5,1</u>	<u>8,6</u>	<u>12,0</u>	<u>22,3</u>	<u>34,9</u>	<u>50,3</u>
	Zinc-plated stud 8.8	[kN]	<u>8,6</u>	<u>13,1</u>	<u>19,4</u>	<u>36,0</u>	<u>56,0</u>	<u>80,6</u>
	Stainless steel stud (A2/A4)	[kN]	<u>6,0</u>	<u>9,2</u>	<u>13,7</u>	<u>25,2</u>	<u>39,4</u>	<u>56,8</u>
Effective depth of studs EQ-AC / EQ-A2 / EQ-A4								
Metric			M8	M10	M12	M16	M20	M24
Effective depth		[mm]	80	90	110	128	170	210

The values underlined and in italics indicate steel failure

Simplified calculation method. European Technical Assessment ETA 13/0753

Simplified version of the calculation method according to Eurocode 2 EN 1992-4. Resistance is calculated according to the data shown in assessment ETA 13/0753.

- Influence of concrete resistance.
- Influence of the distance from the edge of the concrete.
- Influence of the spacing between anchors.
- Influence of rebars.
- Influence of the base material thickness.
- Influence of the load application angle.
- Influence of the effective depth.
- Valid for a group of two anchors.
- Valid for dry or wet drill holes.

The calculation method is based on the following simplification:
No different loads act on individual anchors, without eccentricity.



INDEXcal

For a more precise calculation and taking into account more constructive arrangements we recommend the use of our INDEXcal calculation program. It can be downloaded free from our website www.indexfix.com




TENSILE LOADS


- Calculated steel resistance: $N_{Rd,s}$
- Calculated extraction resistance: $N_{Rd,p} = N_{Rd,p}^o \cdot \Psi_c \cdot \Psi_{hef,p}$
- Calculated concrete cone resistance: $N_{Rd,c} = N_{Rd,c}^o \cdot \Psi_b \cdot \Psi_{s,N} \cdot \Psi_{c,N} \cdot \Psi_{re,N} \cdot \Psi_{hef,N}$
- Calculated concrete cracking resistance: $N_{Rd,sp} = N_{Rd,c}^o \cdot \Psi_b \cdot \Psi_{s,sp} \cdot \Psi_{c,sp} \cdot \Psi_{re,N} \cdot \Psi_{h,sp} \cdot \Psi_{hef,N}$

MO-V


Calculated steel resistance							
$N_{Rd,s}$							
Metric		M8	M10	M12	M16	M20	M24
$N_{Rd,s}^o$	Steel class 5.8	[kN]	12.0	19.3	28.0	52.7	118.0
	Steel class 8.8	[kN]	19.3	30.7	44.7	84.0	188.0
	Steel class 10.9	[kN]	27.8	43.6	63.2	118.0	265.4
	Stainless steel Class A2-70, A4-70	[kN]	13.9	21.9	31.6	58.8	92.0




Calculated extraction resistance								
$N_{Rd,p} = N_{Rd,p}^o \cdot \Psi_c \cdot \Psi_{hef,p}$								
Metric		M8	M10	M12	M16	M20	M24	
$N_{Rd,p}^o$	Non-cracked concrete	[kN]	13.4	15.7	27.6	35.7	50.4	66.0



Calculated concrete cone resistance								
$N_{Rd,c} = N_{Rd,c}^o \cdot \Psi_b \cdot \Psi_{s,N} \cdot \Psi_{c,N} \cdot \Psi_{re,N} \cdot \Psi_{hef,N}$								
Metric		M8	M10	M12	M16	M20	M24	
$N_{Rd,c}^o$	Non-cracked concrete	[kN]	19,6	23,3	31,5	39,6	60,6	83,2




Calculated concrete cracking resistance								
$N_{Rd,sp} = N_{Rd,c}^o \cdot \Psi_b \cdot \Psi_{s,sp} \cdot \Psi_{c,sp} \cdot \Psi_{re,N} \cdot \Psi_{h,sp} \cdot \Psi_{hef,N}$								
Metric		M8	M10	M12	M16	M20	M24	
$N_{Rd,sp}^o$	Non-cracked concrete	[kN]	19,6	23,3	31,5	39,6	60,6	83,2











MO-V

Influence coefficients



$$\Psi_b = \sqrt{\frac{f_{ck,cube}}{25}} \geq 1$$



Influence of concrete resistance for extraction Ψ_c					
Concrete type		C20/25	C30/37	C40/50	C50/60
Ψ_c	Non-cracked concrete	1.00	1.12	1.19	1.30

Influence of concrete resistance for concrete cone and concrete cracking Ψ_b					
Concrete type		C20/25	C30/37	C40/50	C50/60
Ψ_b		1.00	1.22	1.41	1.55

Influence of spacing between anchors (concrete cone) $\Psi_{s,N}$										
$s/s_{cr,N}$	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
$\Psi_{s,N}$	0.55	0.60	0.65	0.70	0.75	0.80	0.85	0.90	0.95	1.00

$$\Psi_{s,N} = 0.5 \left(1 + \frac{s}{s_{cr,N}} \right) \leq 1$$

Influence of spacing between anchors (cracking) $\Psi_{s,sp}$										
$s/s_{cr,sp}$	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
$\Psi_{s,sp}$	0.55	0.60	0.65	0.70	0.75	0.80	0.85	0.90	0.95	1.00

$$\Psi_{s,sp} = 0.5 \left(1 + \frac{s}{s_{cr,sp}} \right) \leq 1$$

Influence of the distance from the edge of the concrete (concrete cone) $\Psi_{c,N}$												
$c/C_{cr,N}$	0.1	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.6
$\Psi_{c,N}$	0.40	0.46	0.51	0.45	0.49	0.55	0.61	0.67	0.75	0.83	0.91	1.00

$$\Psi_{c,N} = 0.35 + \frac{0.5 \cdot c}{C_{cr,N}} + \frac{0.15 \cdot c^2}{C_{cr,N}^2} \leq 1$$

Influence of the distance from the edge of the concrete (cracking) $\Psi_{c,sp}$												
$c/C_{cr,sp}$	0.1	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.6
$\Psi_{c,sp}$	0.40	0.46	0.51	0.45	0.49	0.55	0.61	0.67	0.75	0.83	0.91	1.00

$$\Psi_{c,sp} = 0.35 + \frac{0.5 \cdot c}{C_{cr,sp}} + \frac{0.15 \cdot c^2}{C_{cr,sp}^2} \leq 1$$

Influence of the rebars $\Psi_{re,N}$					
h_{ef} (mm)	64	70	80	90	100
$\Psi_{re,N}$	0.82	0.85	0.90	0.95	1.00

$$\Psi_{re,N} = 0.5 + \frac{h_{ef}}{200} \leq 1$$


Influence of the base material thickness $\Psi_{h,sp}$											
$\Psi_{h,sp}$	h/h_{ef}	2.00	2.20	2.40	2.60	2.80	3.00	3.20	3.40	3.60	3.68
	fh	1.00	1.07	1.13	1.19	1.25	1.31	1.37	1.42	1.48	1.50

$$\Psi_{h,sp} = \left(\frac{h}{2 \cdot h_{ef}} \right)^{2/3} \leq 1.5$$




MO-V

Influence of the effective depth for the extraction combination $\Psi_{hef,p}$						
Metric h_{ef}	M8	M10	M12	M16	M20	M24
64	0.80					
80	1.00	0.89				
90	1.13	1.00	0.82			
96	1.20	1.07	0.87			
110		1.22	1.00			
120		1.33	1.09			
128			1.16	1.00		
144			1.31	1.13		
160				1.25	0.94	
170				1.33	1.00	
192				1.50	1.13	0.91
210					1.24	1.00
240					1.41	1.14
288						1.37

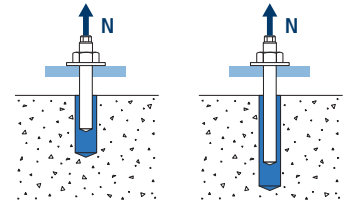

$$\Psi_{hef,p} = \frac{h_{ef}}{h_{stand}}$$

Influence of the effective depth for the concrete cone $\Psi_{hef,N}$						
Metric h_{ef}	M8	M10	M12	M16	M20	M24
64	0.72					
80	1.00	0.84				
90	1.19	1.00				
96	1.31	1.10	0.82			
110	1.61	1.35	1.00			
120	1.84	1.54	1.14	0.91		
128	2.02	1.70	1.26	1.00	0.65	
144		2.02	1.50	1.19	0.78	
160		2.37	1.75	1.40	0.91	0.67
170		2.60	1.92	1.53	1.00	0.73
192			2.31	1.84	1.20	0.87
210			2.64	2.10	1.37	1.00
240			3.22	2.57	1.68	1.22
288				3.38	2.21	1.61

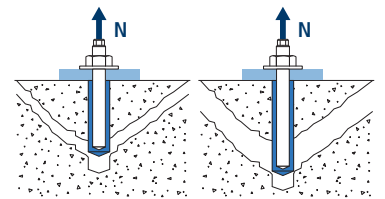




$$\Psi_{hef,N} = \left(\frac{h_{ef}}{h_{stand}} \right)^{1.5}$$



MO-V

SHEARING LOADS

- Calculated steel resistance without lever arm: $V_{Rd,s}$
- Calculated spalling resistance: $V_{Rd,cp} = k \cdot N_{Rd,c}^{\circ}$
- Calculated concrete edge resistance: $V_{Rd,c} = V_{Rd,c}^{\circ} \cdot \Psi_b \cdot \Psi_{se,V} \cdot \Psi_{c,V} \cdot \Psi_{re,V} \cdot \Psi_{\alpha,V} \cdot \Psi_{h,V}$



Calculated steel resistance to shearing

		$V_{Rd,s}$						
Metric		M8	M10	M12	M16	M20	M24	
$V_{Rd,s}^{\circ}$	Steel class 5.8	[kN]	7.2	12	16.8	31.2	48.8	70.4
	Steel class 8.8	[kN]	12	18.4	27.2	50.4	78.4	112.8
	Steel class 10.9	[kN]	12	19.3	28	52.7	82	118
	Stainless steel Class A2-70, A4-70	[kN]	8.3	12.8	19.2	35.3	55.1	79.5


Calculated spalling resistance

		$V_{Rd,cp} = k \cdot N_{Rd,c}^{\circ}$					
Metric		M8	M10	M12	M16	M20	M24
k		2					

Calculated concrete edge resistance

		$V_{Rd,c} = V_{Rd,c}^{\circ} \cdot \Psi_b \cdot \Psi_{se,V} \cdot \Psi_{c,V} \cdot \Psi_{re,V} \cdot \Psi_{\alpha,V} \cdot \Psi_{h,V}$						
Metric		M8	M10	M12	M16	M20	M24	
$V_{Rd,c}^{\circ}$	Non-cracked concrete	[kN]	5.7	8.6	11.8	19.0	28.3	36.4

Influence coefficients





$$\Psi_b = \sqrt{\frac{f_{ck,cube}}{25}} \geq 1$$

Influence of concrete resistance for concrete cone and concrete cracking Ψ_b				
Concrete type	C20/25	C30/37	C40/50	C50/60
Ψ_b	1.00	1.22	1.41	1.55

Influence of the distance from the edge and spacing between anchors $\Psi_{se,V}$

For one anchor																	
c/h_{ef}	0.50	0.75	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.50	5.00
Insulated	0.35	0.65	1.00	1.40	1.84	2.32	2.83	3.38	3.95	4.56	5.20	5.86	6.55	7.26	8.00	9.55	11.18
For two anchors																	
c/h_{ef}	0.50	0.75	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.50	5.00
1.0	0.24	0.43	0.67	0.93	1.22	1.54	1.89	2.25	2.64	3.04	3.46	3.91	4.37	4.84	5.33	6.36	7.45
1.5	0.27	0.49	0.75	1.05	1.38	1.74	2.12	2.53	2.96	3.42	3.90	4.39	4.91	5.45	6.00	7.16	8.39
2.0	0.29	0.54	0.83	1.16	1.53	1.93	2.36	2.81	3.29	3.80	4.33	4.88	5.46	6.05	6.67	7.95	9.32
2.5	0.32	0.60	0.92	1.28	1.68	2.12	2.59	3.09	3.62	4.18	4.76	5.37	6.00	6.66	7.33	8.75	10.25
≥ 3.0	0.35	0.65	1.00	1.40	1.84	2.32	2.83	3.38	3.95	4.56	5.20	5.86	6.55	7.26	8.00	9.55	11.18



$$\Psi_{se,V} = \left(\frac{c}{h_{ef}}\right)^{1.5}$$

$$\Psi_{se,V} = \left(\frac{c}{h_{ef}}\right)^{1.5} \cdot \left(1 + \frac{s}{3 \cdot c}\right) \cdot 0.5 \leq \left(\frac{c}{h_{ef}}\right)^{1.5}$$




MO-V

Influence of the distance from the edge of the concrete $\Psi_{c,v}$

c/d	4	5	7	10	15	20	25	30
$\Psi_{c,v}$	0.76	0.72	0.68	0.63	0.58	0.55	0.53	0.51


$$\Psi_{c,v} = \left(\frac{d}{c}\right)^{0.20}$$



Influence of the effective depth $\Psi_{hef,v}$


h_{ef}/d	8	9	10	11	12
$\Psi_{hef,v}$	1.65	2.04	2.47	2.93	3.42

$$\Psi_{hef,v} = 0.04 \cdot \left(\frac{h_{ef}}{d}\right)^{1.79}$$



Influence of the rebars $\Psi_{re,v}$


$\Psi_{re,v}$	Non-cracked concrete	Without perimeter rebar	Perimeter rebar $\geq \varnothing 12\text{mm}$	Perimeter rebar with abutments at $\leq 100\text{mm}$
		1	1	1



Influence of the load application angle $\Psi_{\alpha,v}$

Angle, α (°)	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°
$\Psi_{\alpha,v}$	1.00	1.01	1.05	1.13	1.24	1.40	1.64	1.97	2.32	2.50


$$\Psi_{\alpha,v} = \sqrt{\frac{1}{(\cos \alpha_v)^2 + \left(\frac{\sin \alpha_v}{2.5}\right)^2}} \geq 1$$



Influence of the base material thickness $\Psi_{h,v}$

h/c	0.15	0.30	0.45	0.60	0.75	0.90	1.05	1.20	1.35	≥ 1.5
$\Psi_{h,v}$	0.32	0.45	0.55	0.63	0.71	0.77	0.84	0.89	0.95	1.00

$$\Psi_{h,v} = \left(\frac{h}{1.5 \cdot c}\right)^{0.5} \geq 1.0$$





MO-V

RANGE VINYLESTER



CODE	DIMENSION	
NORMAL		
MOV300	300 ml	12
MOV410	410 ml	12



Accessories for chemical anchor cartridges

MO-PIS Application guns



CODE	MODEL
MOPISTO	Manual
MOPISPR	Professional 410 ml
MOPISSI	Silicone 300 ml
MOPISNEU	Pneumatic

MO-AC Mixing tubes and miscellaneous




CODE	MODEL
MOBOMBA	Blower pump
MORCANU	Tube 170 - 300 - 410 ml
MORCEPKIT	Kit 3 brushes

EQ-AC Zinc-plated 5.8



CODE	DIMENSION
EQAC08110	M8 x 110
EQAC10130	M10 x 130
EQAC10190	M10 x 190
EQAC12160	M12 x 160
EQAC12220	M12 x 220
EQAC16190	M16 x 190
EQAC16250	M16 x 250
EQAC20260	M20 x 260
EQAC20350	M20 x 350
EQAC24300	M24 x 300
EQAC24380	M24 x 380
EQAC30330	M30 x 330

EQ-A2 Stainless steel A2



CODE	DIMENSION
EQA208110	M8 x 110
EQA210130	M10 x 130
EQA212160	M12 x 160
EQA216190	M16 x 190
EQA220260	M20 x 260
EQA224300	M24 x 300
EQA230330	M30 x 330

EQ-8.8 Zinc-plated 8.8



CODE	DIMENSION
EQ8808110	M8 x 11040
EQ8810130	M10 x 130
EQ8812160	M12 x 160
EQ8816190	M16 x 190
EQ8820260	M20 x 260
EQ8824300	M24 x 300

EQ-A4 Stainless steel A4



CODE	DIMENSION
EQA408110	M8 x 110
EQA410130	M10 x 130
EQA412160	M12 x 160
EQA416190	M16 x 190
EQA420260	M20 x 260
EQA424300	M24 x 300
EQA430330	M30 x 330