


PSE-UN




PRODUCT DESCRIPTION

· Connector for aluminium profile for assembled fixing

CHARACTERISTICS

- Profile for the lengthwise joining of PSE-A profiles.
- Extruded 6063-T6 aluminium alloy profile.
- For outside use.
- Interior coupling for PSE-A profiles without interfering with any operations
- 200 mm length for a strong joint.

ASSEMBLY APPLICATIONS/ACCESSORIES






PSE-A ABEI5519

Used in **coplanar and triangular aluminium installation systems** for the lengthwise joining of **PSE-A** "aluminium profile for assembled fixing".

Its specific design allows profiles to be joined via their central cavity without interfering with any operations.

The fixing of profiles to joints is via stainless steel A2-70 **ABEI5519** "DIN-7504-K self-drilling screws". These screws are easily positioned thanks to the grooves in the sides of the profiles.

APPLICATION EXAMPLE

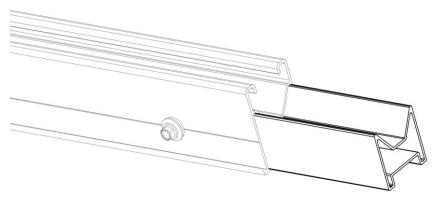

Application example 1: Lengthwise joining of PSE-A profiles.

1. RANGE								
ITEM	CODE	РНОТО	DESCRIPTION	LENGTH	MATERIAL			
1	PSEUN60200		Connector for aluminium profile for assembled fixing	200 mm	6063-T6 aluminium			

Ref. FT_GS_P_PSE-UN_en Rev: 0 26/01/22 1 of 2



2. INSTALLATION INFORMATION

2.1 PSE-UN Connector for aluminium profile for assembled fixing.







Assembly

accessories

6063-T6 aluminium

Material

Aluminium profile for assembled fixing


Compatible with


ABEI5519

Measurement table

Code	A	B	C	E1	L
	(mm)	(mm)	(mm)	(mm)	(mm)
PSEUN60200	38.3	40.2	7.5	1.5	200

Drawing

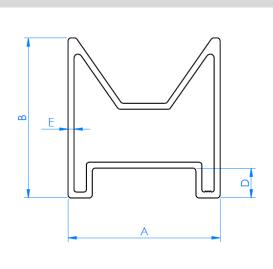

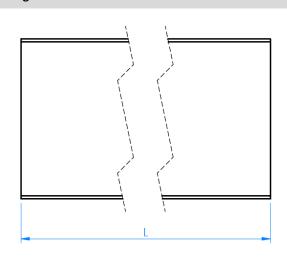

Mechanical properties of the material								
	Yield strength Fy 0.2 (N/mm²)	Ultimate load F _u (N/mm²)	Elastic modulus E (N/mm²)	Transverse elastic modulus G (N/mm²)	Linear expansion coefficient αι (μm/mK)	Specific weight ρ (kg/m³)		
EN AW-6063-T6 aluminium	170	215	69,500	26,100	23.5	2,700		

Mechanical properties of the profile.							
	Area	Moment of inertia	Moment of inertia	Section modulus	Section modulus	Linear weight	
	(cm²)	lx (cm ₄)	ly (cm ₄)	Wx (cm³)	W _Y (cm³)	W (kg/m)	
PSE-UN	2.78	4.17	6.1	1.98	3.18	0.75	

Ref. FT_GS_P_PSE-UN_en Rev: 0 26/01/22 2 of 2