




TFE



TFJ



TFA



TFT



TFP



TFN



TFM



TFF



TFS

CHARACTERISTICS

- Pilot hole in concrete needed, thread is created by the anchor during the Installation process.
- Use for high loads. High fire resistance.
- Assessed for 2 installation depths and 3 for Ø10.
- Use in cracked and non-cracked concrete.
- Comply with guideline VdS CEA 4001:2021-01(07) "Guidelines for sprinklers systems. Planning and installation"
- Suitable when reduced edge distances or spacing required.
- Qualified for static and quasi-static.
- Easy installation.
- Installation through the fixture.
- Possibility of installation by drill bit cleaning
- DIT Reusable for temporary elements in concrete from Ø8 to Ø14.
- Removable, leaving concrete surface flat.
- Variety of lengths and sizes, assembly flexibility.
- VdS available from Ø6 to Ø18
- Base material temperature range: -40°C to +80 °C
- Available in INDEXcal

APPLICATION

- Structural fixings in cracked and uncracked concrete subject to dry internal conditions.
- Glazing, windows and storefronts
- Racking and shelving
- Attaching railings, handrails and ledgers
- Fixings wood structures in concrete

ASSESSMENTS




BASE MATERIAL



SIZE RANGE

Ø5 - Ø18


DRILL CONDITION



DRY WET FLOODED

MAXIMUM LOADS RECOMMENDED
FOR CRACKED AND UNCRACKED
CONCRETE [kg]

TH/TF

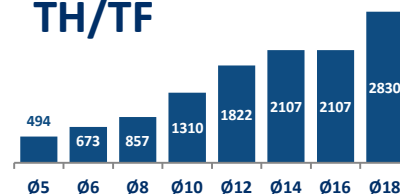

APPLICATION EXAMPLES




1. RANGE


ITEM	CODE	SIZES	PHOTO	DESCRIPTION	MATERIAL	COVERING
1	TFE	Ø5 - Ø18		Hexagonal head with flange screw anchor	Carbon steel, zinc plated coating ≥ 5 µm	
2	TFJ	Ø6		Hexagonal head with flange screw anchor and TX recess	Carbon steel, zinc plated coating ≥ 5 µm	
3	TFA	Ø5 - Ø10		Countersunk screw anchor	Carbon steel, zinc plated coating ≥ 5 µm	
4	TFT	Ø6		Truss head screw anchor	Carbon steel, zinc plated coating ≥ 5 µm	
5	TFP	Ø5 - Ø8		Pan head screw anchor	Carbon steel, zinc plated coating ≥ 5 µm	
6	TFN	Ø14		Hexagonal head screw anchor	Carbon steel, zinc plated coating ≥ 5 µm	
7	TFF	Ø5 - Ø8		Rod hanger internal thread screw anchor	Carbon steel, zinc plated coating ≥ 5 µm	
8	TFM	Ø6		Hexagonal head with flange and with external thread screw anchor	Carbon steel, zinc plated coating ≥ 5 µm	
9	TFS	Ø6 - Ø10		Stud head screw anchor	Carbon steel, zinc plated coating ≥ 5 µm	

2. INSTALLATION DATA

2.1. INSTALLATION DRAWING

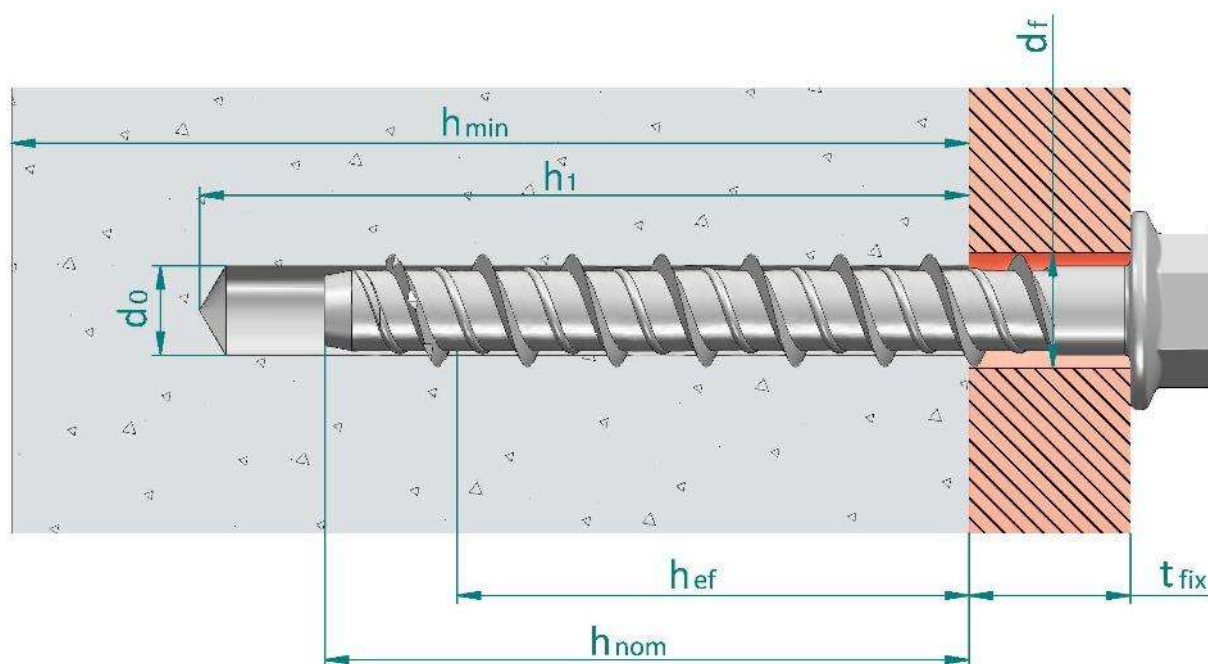

- d_0 : Nominal diameter of drill bit
- d_b : Bottom flange thickness
- d_f : Fixture clearance hole diameter
- h_{ef} : Effective anchorage depth
- h_1 : Depth of drilled hole
- h_{nom} : Overall fastener embedment depth in the concrete
- h_{min} : Minimum thickness of concrete member
- t_{fix} : Fixture thickness

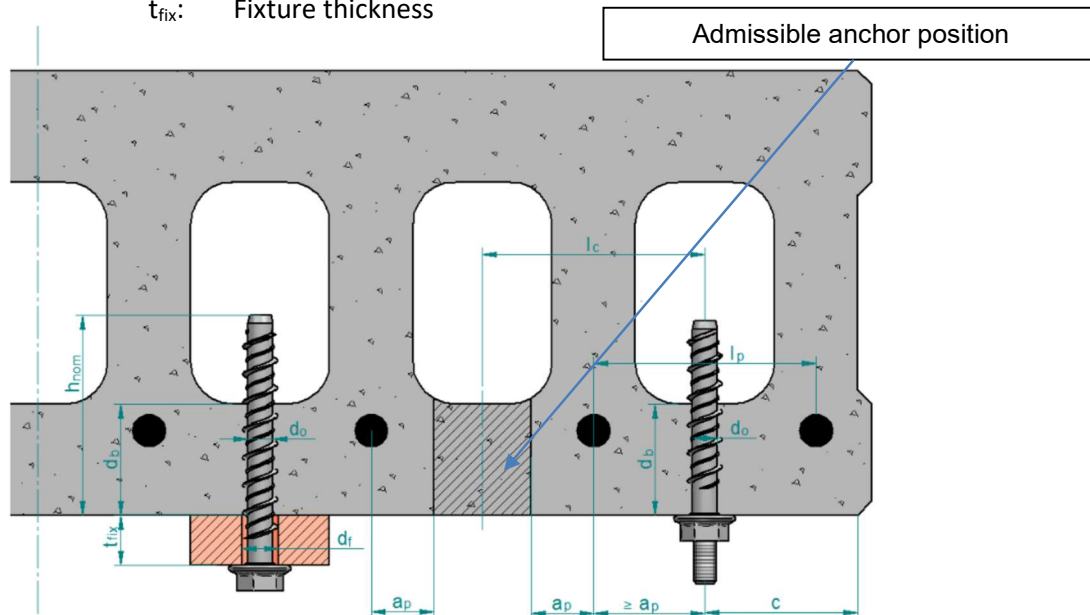

2.2. SEISMIC LOAD ASSESSMENT

Family	Code	Size (Letter)	Assessed	C1	C2	Family	Code	Size (Letter)	Assessed	C1	C2
[--]	[--]	[--]	ETA	[--]	[--]	[--]	[--]	[--]	ETA	[--]	[--]
TFE	TFE05040	Ø5 x 40 (A)	✓*	--	--	TFJ	TFJ06043	Ø6 x 43	✓	--	--
	TFE05050	Ø5 x 50 (A)	✓*	--	--	TFA	TFA05040	Ø5 x 40 (A)	✓*	--	--
	TFE05060	Ø5 x 60 (B)	✓*	--	--		TFA05060	Ø5 x 60 (B)	✓*	--	--
	TFE05080	Ø5 x 80 (D)	✓*	--	--		TFA05080	Ø5 x 80 (D)	✓*	--	--
	TFE05100	Ø5 x 100 (E)	✓*	--	--		TFA05100	Ø5 x 100 (E)	✓*	--	--
	TFE06035	Ø6 x 35	✓	--	--		TFA06045	Ø6 x 45	✓	--	--
	TFE06040	Ø6 x 40	✓	--	--		TFA06050	Ø6 x 50	✓	--	--
	TFE06045	Ø6 x 45	✓	--	--		TFA06060	Ø6 x 60	✓	✓	--
	TFE06050	Ø6 x 50	✓	--	--		TFA06080	Ø6 x 80	✓	✓	--
	TFE06060	Ø6 x 60	✓	✓	--		TFA06100	Ø6 x 100	✓	✓	--
	TFE06070	Ø6 x 70	✓	✓	--		TFA06120	Ø6 x 120	✓	✓	--
	TFE06080	Ø6 x 80	✓	✓	--		TFA06140	Ø6 x 140	✓	✓	--
	TFE06100	Ø6 x 100	✓	✓	--		TFA08060	Ø8 x 60	✓	✓	✓
	TFE06120	Ø6 x 120	✓	✓	--		TFA08080	Ø8 x 80	✓	✓	✓
	TFE08055	Ø8 x 55	✓	✓	✓		TFA08100	Ø8 x 100	✓	✓	✓
	TFE08060	Ø8 x 60	✓	✓	✓		TFA08120	Ø8 x 120	✓	✓	✓
	TFE08070	Ø8 x 70	✓	✓	✓		TFA10100	Ø10 x 100	✓	✓	✓
	TFE08075	Ø8 x 75	✓	✓	✓		TFA10120	Ø10 x 120	✓	✓	✓
	TFE08080	Ø8 x 80	✓	✓	✓	TFT	TFT06040	Ø6 x 40	✓	--	--
	TFE08090	Ø8 x 90	✓	✓	✓		TFT06050	Ø6 x 50	✓	--	--
	TFE08100	Ø8 x 100	✓	✓	✓		TFT06060	Ø6 x 60	✓	✓	--
	TFE08110	Ø8 x 110	✓	✓	✓		TFP05040	Ø5 x 40 (A)	✓*	--	--
	TFE08120	Ø8 x 120	✓	✓	✓	TFP	TFP05060	Ø5 x 60 (B)	✓*	--	--
	TFE08140	Ø8 x 140	✓	✓	✓		TFP06040	Ø6 x 40	✓	--	--
	TFE10060	Ø10 x 60	✓	✓	--		TFP06050	Ø6 x 50	✓	--	--
	TFE10070	Ø10 x 70	✓	✓	--		TFP06060	Ø6 x 60	✓	✓	--
	TFE10080	Ø10 x 80	✓	✓	--		TFP06080	Ø6 x 80	✓	✓	--
	TFE10090	Ø10 x 90	✓	✓	✓		TFP06100	Ø6 x 100	✓	✓	--
	TFE10100	Ø10 x 100	✓	✓	✓	TFF	TFP08060	Ø8 x 60	✓	✓	✓
	TFE10120	Ø10 x 120	✓	✓	✓		TFP08080	Ø8 x 80	✓	✓	✓
	TFE10140	Ø10 x 140	✓	✓	✓		TFF05035S	Ø5 x 35 (M6)	✓*	--	--
	TFE10160	Ø10 x 160	✓	✓	✓		TFF06035	Ø6 x 35 (M8-M10)	✓	--	--
	TFE10180	Ø10 x 180	✓	✓	✓		TFF06040	Ø6 x 40 (M8-M10)	✓	--	--
	TFE12080	Ø12 x 80	✓	✓	--		TFF06055	Ø6 x 55 (M8-M10)	✓	--	--
	TFE12090	Ø12 x 90	✓	✓	--		TFF08050T	Ø8 x 50 (M10)	✓	--	--
	TFE12100	Ø12 x 100	✓	✓	--		TFF08050W	Ø8 x 50 (M12)	✓	--	--
	TFE12110	Ø12 x 110	✓	✓	✓	TFM	TFM06035	Ø6 x 35 (M8)	✓	--	--
	TFE12130	Ø12 x 130	✓	✓	✓		TFM06055	Ø6 x 55 (M10)	✓	--	--
	TFE12150	Ø12 x 150	✓	✓	✓	TFN	TFN14080	Ø14 x 80	✓	--	--
	TFE14080	Ø14 x 80	✓	--	--	TFS	TFS06100	Ø6 x 100 (M8)	✓	✓	--
	TFE14100	Ø14 x 100	✓	--	--		TFS06120	Ø6 x 120 (M8)	✓	✓	--
	TFE14110	Ø14 x 110	✓	--	--		TFS08110	Ø8 x 110 (M10)	✓	✓	✓
	TFE14120	Ø14 x 120	✓	✓	✓		TFS08130	Ø8 x 130 (M10)	✓	✓	✓
	TFE14130	Ø14 x 130	✓	✓	✓		TFS10120	Ø10 x 120 (M12)	✓	✓	✓
	TFE14140	Ø14 x 140	✓	✓	✓		TFS10140	Ø10 x 140 (M12)	✓	✓	✓
	TFE14160	Ø14 x 160	✓	✓	✓						
	TFE16100	Ø16 x 100	✓	✓	--						
	TFE16150	Ø16 x 150	✓	✓	✓						
	TFE18100	Ø18 x 100	✓	--	--						
	TFE18130	Ø18 x 130	✓	--	--						
	TFE18160	Ø18 x 160	✓	✓	✓						
	TFE18180	Ø18 x 180	✓	✓	✓						
	TFE18200	Ø18 x 200	✓	✓	✓						

3. INSTALLATION PARAMETERS (CONCRETE)

General Installation parameters										Standard Installation depth ($h_{ef, std}$)									Reduced Installation depth ($h_{ef, red}$)									
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole/ Depth for drill bit cleaning	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole/ Depth for drill bit cleaning	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	
[--]	[--]	[--]	ETA	d_0 [mm]	d_f [mm]	SW/Tx [--]	T_{inst} [Nm]	S_{min} [mm]	C_{min} [mm]	h_{min} [mm]	$h_1 / h_{1, bit}$ [mm]	h_{nom} [mm]	h_{ef} [mm]	t_{fix} [mm]	$S_{cr, N}$ [mm]	$C_{cr, N}$ [mm]	$S_{cr, sp}$ [mm]	$C_{cr, sp}$ [mm]	h_{min} [mm]	$h_1 / h_{1, bit}$ [mm]	h_{nom} [mm]	h_{ef} [mm]	t_{fix} [mm]	$S_{cr, N}$ [mm]	$C_{cr, N}$ [mm]	$S_{cr, sp}$ [mm]	$C_{cr, sp}$ [mm]	
TFE	TFE05040	Ø5 x 40(A)	✓*	5	6,5 - 8	SW 8	8	35	35	--	--	--	--	--	--	--	--	--	--	80	40/50	35	26,5	5	80	40	80	40
	TFE05050	Ø5 x 50(A)	✓*			SW 8				5	105	53	105	53	15													
	TFE05060	Ø5 x 60(B)	✓*			SW 8				15					25													
	TFE05080	Ø5 x 80(D)	✓*			SW 8				35					45													
	TFE05100	Ø5 x 100(E)	✓*			SW 8				55					65													
	TFE06035	Ø6 x 35	✓	6	7,5 - 9	SW 10	10	35	35	--	--	--	--	--	--	--	--	--	--	100	40/52	35	26,0	--	78	39	90	45
	TFE06040	Ø6 x 40	✓			SW 10				--	--	--	--	--	--	5												
	TFE06045	Ø6 x 45	✓			SW 10				--	--	--	--	--	--	10												
	TFE06050	Ø6 x 50	✓			SW 10				--	--	--	--	--	--	15												
	TFE06060	Ø6 x 60	✓			SW 10				100	60/72	55	43,0	5	129	65	170	85	25									
	TFE06070	Ø6 x 70	✓			SW 10								15					35									
	TFE06080	Ø6 x 80	✓			SW 10								25					45									
	TFE06100	Ø6 x 100	✓			SW 10								45					65									
	TFE06120	Ø6 x 120	✓			SW 10								65					85									
	TFE08055	Ø8 x 55	✓	8	10,5 - 12	SW 13	20	35	35	--	--	--	--	--	--	--	--	--	--	100	60/76	50	37,5	5	113	57	130	65
	TFE08060	Ø8 x 60	✓			SW 13				--	--	--	--	--	--	10												
	TFE08070	Ø8 x 70	✓			SW 13				100	75/91	65	50,5	5	152	76	200	100	20									
	TFE08075	Ø8 x 75	✓			SW 13								10					25									
	TFE08080	Ø8 x 80	✓			SW 13								15					30									
	TFE08090	Ø8 x 90	✓			SW 13								25					40									
	TFE08100	Ø8 x 100	✓			SW 13								35					50									
	TFE08110	Ø8 x 110	✓			SW 13								45					60									
	TFE08120	Ø8 x 120	✓			SW 13								55					70									
	TFE08140	Ø8 x 140	✓			SW 13								75					90									

*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

General Installation parameters										Standard Installation depth (h _{ef, std})									Reduced Installation depth (h _{ef, red})								
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole/ Depth for drill bit cleaning	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole/ Depth for drill bit cleaning	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)
[--]	[--]	[--]	ETA	d ₀ [mm]	d _f [mm]	SW/Tx [--]	T _{inst} [Nm]	S _{min} [mm]	C _{min} [mm]	h _{min} [mm]	h ₁ / h _{1,bit} [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]	h _{min} [mm]	h ₁ / h _{1,bit} [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]
TFE	TFE10060	Ø10 x 60	✓	10	12,5 -14	SW 15	30	50	40	--	--	--	--	--	--	--	--	--	100	65/85	55	41,5	5	125	63	140	70
	TFE10070	Ø10 x 70	✓			SW 15				--	--	--	--	--	--	--	--	--					15				
	TFE10080	Ø10 x 80	✓			SW 15				--	--	--	--	--	--	--	--	--					25				
	TFE10090	Ø10 x 90	✓			SW 15				135	95/115	85	67,0	5	201	101	210	105					35				
	TFE10100	Ø10 x 100	✓			SW 15								15								45					
	TFE10120	Ø10 x 120	✓			SW 15								35								65					
	TFE10140	Ø10 x 140	✓			SW 15								55								85					
	TFE10160	Ø10 x 160	✓			SW 15								75								105					
	TFE10180	Ø10 x 180	✓			SW 15				95	125	120	90/114	75	58,0	174	87	190				95					
	TFE12080	Ø12 x 80	✓	SW 18	--	--	--	--	--	--	--								--	--	5						
	TFE12090	Ø12 x 90	✓	SW 18	--	--	--	--	--	--	--								--	--	15						
	TFE12100	Ø12 x 100	✓	SW 18	--	--	--	--	--	--	--								--	--	25						
	TFE12110	Ø12 x 110	✓	SW 18	170	120/144	105	83,5	5	251	126								220	110	35						
	TFE12130	Ø12 x 130	✓	SW 18					25			55															
	TFE12150	Ø12 x 150	✓	SW 18					45			75	120	90/118	75	58,0	174	87			190	95					
	TFE14080	Ø14 x 80	✓	SW 21	--	--	--	--	--	--	--	--							--	5							
	TFE14100	Ø14 x 100	✓	SW 21	--	--	--	--	--	--	--	--							--	25							
	TFE14110	Ø14 x 110	✓	SW 21	--	--	--	--	--	--	--	--							--	35							
	TFE14120	Ø14 x 120	✓	SW 21	70	80	50	185	130/158	115	92,0	5					276	138	230	115	45	174	87	190	95		
	TFE14130	Ø14 x 130	✓	SW 21								15									55						
	TFE14140	Ø14 x 140	✓	SW 21								25									65						
	TFE14160	Ø14 x 160	✓	SW 21								45	85	115	100/132	80					58					174	87
	TFE16100	Ø16 x 100	✓	SW24	--	--	--	--	--	--	--	--	--				20										
	TFE16150	Ø16 x 150	✓	SW24	185	140/172	120	92	30	276	138	280	140				70										
	TFE18100	Ø18 x 100	✓	SW 24	--	--	--	--	--	--	--	--	--				--	10									
	TFE18130	Ø18 x 130	✓	SW 24	--	--	--	--	--	--	--	--	--	--	40												
	TFE18160	Ø18 x 160	✓	SW 24	18	20,9 -22	90	90	55	225	160/196	140	112	20	336	168	350	175	140	110/146	90	69,5	70	209	105	230	115
	TFE18180	Ø18 x 180	✓	SW 24										40									90				
	TFE18200	Ø18 x 200	✓	SW 24										60									110				
TFJ	TFJ06043	Ø6 x 43	✓	6	7,5 - 9	SW 13 TX 30	10	35	35	--	--	--	--	--	--	--	--	--	100	40/52	35	26,0	8	78	39	90	45

General Installation parameters										Standard Installation depth (h _{ef, std})									Reduced Installation depth (h _{ef, red})									
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole/ Depth for drill bit cleaning	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole/ Depth for drill bit cleaning	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	
[--]	[--]	[--]	ETA	d ₀ [mm]	d _f [mm]	SW/Tx [--]	T _{inst} [Nm]	S _{min} [mm]	C _{min} [mm]	h _{min} [mm]	h ₁ / h _{1,bit} [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]	h _{min} [mm]	h ₁ / h _{1,bit} [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]	
TFA	TFA05040	Ø5 x 40(A)	✓*	5	6,5 - 8	TX25	8	35	35	--	--	--	--	--	--	--	--	--	80	40/50	35	26,5	5	80	40	80	40	
	TFA05060	Ø5 x 60(B)	✓*			TX25				15	105	53	105	53	25													
	TFA05080	Ø5 x 80(D)	✓*			TX25				35					45													
	TFA05100	Ø5 x 100(E)	✓*			TX25				55					65													
	TFA06045	Ø6 x 45	✓	6	7,5 - 9	TX30	10	35	35	--	--	--	--	--	--	--	--	100	40/52	35	26,0	10	78	39	90	45		
	TFA06050	Ø6 x 50	✓			TX30				--	--	--	--	--	15													
	TFA06060	Ø6 x 60	✓			TX30				5	129	65	170	85	25													
	TFA06080	Ø6 x 80	✓			TX30				25					45													
	TFA06100	Ø6 x 100	✓			TX30				45					65													
	TFA06120	Ø6 x 120	✓			TX30				65					85													
	TFA06140	Ø6 x 140	✓			TX30				85					105													
	TFA08060	Ø8 x 60	✓	8	10,5 - 12	TX45	20	35	35	--	--	--	--	--	--	--	--	--	100	60/76	50	37,5	10	113	57	130	65	
	TFA08080	Ø8 x 80	✓			TX45				15	152	76	200	100	30													
	TFA08100	Ø8 x 100	✓			TX45				35					50													
	TFA08120	Ø8 x 120	✓			TX45				55					70													
TFT	TFA10100	Ø10 x 100	✓	10	12,5 - 14	TX50	30	50	40	135	95/115	85	67,0	15	201	101	210	105	100	65/85	55	41,5	45	125	63	140	70	
	TFA10120	Ø10 x 120	✓			TX50				35	65																	
	TFT06040	Ø6 x 40	✓	6	7,5 - 9	TX30	10	35	35	--	--	--	--	--	--	--	--	--	100	40/52	35	26,0	5	78	39	90	45	
	TFT06050	Ø6 x 50	✓			TX30				--	--	--	--	--	--	15												
TFT06060	Ø6 x 60	✓	TX30			100				60/72	55	43,0	5	129	65	170	85	25										
TFP	TFP05040	Ø5 x 40(A)	✓*	5	6,5 - 8	TX30	8	35	35	--	--	--	--	--	--	--	--	--	80	40/52	35	26,5	5	80	40	80	40	
	TFP05060	Ø5 x 60(B)	✓*			TX30				80	50/60	45	35,0	15	105	53	105	53					25					
	TFP06040	Ø6 x 40	✓	6	7,5 - 9	TX40	10	35	35	--	--	--	--	--	--	--	--	--	100	40/52	35	26,0	5	78	39	90	45	
	TFP06050	Ø6 x 50	✓			TX40				--	--	--	--	--	--	15												
	TFP06060	Ø6 x 60	✓			TX40				100	60/72	55	43,0	5	129	65	170	85					25					
	TFP06080	Ø6 x 80	✓			TX40								25									45					
	TFP06100	Ø6 x 100	✓			TX40								45									65					
	TFP08060	Ø8 x 60	✓	8	10,5 - 12	TX45	20	35	35	--	--	--	--	--	--	--	--	--	100	60/76	50	37,5	10	113	57	130	65	
	TFP08080	Ø8 x 80	✓			TX45				100	75/91	65	50,5	15	152	76	200	100					30					

*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

General Installation parameters										Standard Installation depth (h _{ef, std})										Reduced Installation depth (h _{ef, red})									
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole/ Depth for drill bit cleaning	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole/ Depth for drill bit cleaning	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)		
[--]	[--]	[--]	ETA	d ₀ [mm]	d _f [mm]	SW/Tx [--]	T _{inst} [Nm]	S _{min} [mm]	C _{min} [mm]	h _{min} [mm]	h ₁ / h _{1,bit} [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]	h _{min} [mm]	h ₁ / h _{1,bit} [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]		
TFN	TFN14080	Ø14 x 80	✓	14	16,9 -18	SW 24	70	80	50	--	--	--	--	--	--	--	--	--	120	90/118	75	58,0	5	174	87	190	95		
TFF	TFF05035S	Ø5 x 35 (M6)	✓*	5	--	SW10	8	35	35	--	--	--	--	--	--	--	--	--	80	40/50	35	26,5	--	80	40	80	40		
	TFF06035	Ø6 x 35 (M8-M10)	✓	6	--	SW 13	10	35	35	--	--	--	--	--	--	--	--	--	100	40/52	35	26,0	--	78	39	90	45		
	TFF06040	Ø6 x 40 (M8-M10)	✓			SW 13				--	--	--	--	--	100	40/52	35	26,0	--	78	39	90	45						
	TFF06055	Ø6 x 55 (M8-M10)	✓			SW 13				100	60/72	55	43,0	--	129	65	170	85	--	--	--	--	--	--					
	TFF08050T	Ø8 x 50 (M10)	✓	8	--	SW 13	20	35	35	--	--	--	--	--	--	--	--	--	100	60/76	50	37,5	--	113	57	130	65		
	TFF08050W	Ø8 x 50 (M12)	✓			SW 17				--	--	--	--	--	100	60/76	50	37,5	--	113	57	130	65						
TFM	TFM06035	Ø6 x 35 (M8)	✓	6	--	SW 13	10	35	35	--	--	--	--	--	--	--	--	--	100	40/52	35	26,0	--	78	39	90	45		
	TFM06055	Ø6 x 55 (M10)	✓			SW 13				100	60/72	55	43,0	--	129	65	170	85	--	--	--	--	--	--					
TFS	TFS06100	Ø6 x 100 (M8)	✓	6	7,5 - 9	SW 5	10	35	35	100	60/72	55	43,0	36	129	65	170	85	100	40/52	35	26,0	56	78	39	90	45		
	TFS06120	Ø6 x 120 (M8)	✓			SW 5								56									76						
	TFS08110	Ø8 x 110 (M10)	✓	8	10,5 -12	SW 7	20	35	35	100	75/91	65	50,5	36	152	76	200	100	100	60/76	50	37,5	51	113	57	130	65		
	TFS08130	Ø8 x 130 (M10)	✓			SW 7								56									71						
	TFS10120	Ø10 x 120 (M12)	✓	10	12,5 -14	SW 8	30	50	40	135	95/115	85	67,0	25	176	88	190	95	100	65/85	55	41,5	55	125	63	140	70		
	TFS10140	Ø10 x 140 (M12)	✓			SW 8								45									75						

4. INSTALLATION PARAMETERS (HOLLOW CORE SLABS) [Installation depth reduced/intermediate/standard]

General Installation parameters											Installation depth (h_{ef1} / h_{ef2} / h_{ef3})							
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Bottom flange thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)
[--]	[--]	[--]	ETA	d_0 [mm]	d_f [mm]	SW/Tx [--]	T_{inst} [Nm]	S_{min} [mm]	C_{min} [mm]	d_b [mm]	h_1 [mm]	h_{nom} [mm]	h_{ef} [mm]	t_{fix} [mm]	$S_{cr,N}$ [mm]	$C_{cr,N}$ [mm]	$S_{cr,sp}$ [mm]	$C_{cr,sp}$ [mm]
TFE	TFE05040	Ø5 x 40(A)	✓*	5	6,5 - 8	SW 8	8	35	35	25/30/40	30/40/45	30/40/45	20/22/26,5	10/--/--	60/66/80	30/33/40	80	80
	TFE05050	Ø5 x 50(A)	✓*			SW 8								20/10/5				
	TFE05060	Ø5 x 60(B)	✓*			SW 8								30/20/15				
	TFE05080	Ø5 x 80(D)	✓*			SW 8								50/40/35				
	TFE05100	Ø5 x 100(E)	✓*			SW 8								70/60/55				
	TFE06035	Ø6 x 35	✓	6	7,5 - 9	SW 10	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	5/--/--	60/66/78	30/33/39	90	45
	TFE06040	Ø6 x 40	✓			SW 10								10/--/--				
	TFE06045	Ø6 x 45	✓			SW 10								15/5/--				
	TFE06050	Ø6 x 50	✓			SW 10								20/10/5				
	TFE06060	Ø6 x 60	✓			SW 10								30/20/15				
	TFE06070	Ø6 x 70	✓			SW 10								40/30/25				
	TFE06080	Ø6 x 80	✓			SW 10								50/40/35				
	TFE06100	Ø6 x 100	✓			SW 10								70/60/55				
	TFE06120	Ø6 x 120	✓			SW 10								90/80/75				
TFJ	TFJ06043	Ø6 x 43	✓	6	7,5 - 9	SW13 TX 30	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	8/--/--	60/66/78	30/33/39	90	45
TFA	TFA05040	Ø5 x 40(A)	✓*	5	6,5 - 8	TX25	8	35	35	25/30/40	30/40/45	30/40/45	20/22/26,5	10/--/--	60/66/80	30/33/40	80	80
	TFA05060	Ø5 x 60(B)	✓*			TX25								30/20/15				
	TFA05080	Ø5 x 80(D)	✓*			TX25								50/40/35				
	TFA05100	Ø5 x 100(E)	✓*			TX25								70/60/55				
	TFA06045	Ø6 x 45	✓	6	7,5 - 9	TX30	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	15/5/--	60/66/78	30/33/39	90	45
	TFA06050	Ø6 x 50	✓			TX30								20/10/5				
	TFA06060	Ø6 x 60	✓			TX30								30/20/15				
	TFA06080	Ø6 x 80	✓			TX30								50/40/35				
	TFA06100	Ø6 x 100	✓			TX30								70/60/55				
	TFA06120	Ø6 x 120	✓			TX30								90/80/75				
	TFA06140	Ø6 x 140	✓			TX30								110/100/95				


*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

General Installation parameters										Installation depth (h_{ef1} / h_{ef2} / h_{ef3})								
Family	Code	Size (Letter)	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Bottom flange thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)
[--]	[--]	[--]	ETA	d_0 [mm]	d_f [mm]	SW/Tx [--]	T_{inst} [Nm]	S_{min} [mm]	C_{min} [mm]	d_b [mm]	h_1 [mm]	h_{nom} [mm]	h_{ef} [mm]	t_{fix} [mm]	$S_{cr,N}$ [mm]	$C_{cr,N}$ [mm]	$S_{cr,sp}$ [mm]	$C_{cr,sp}$ [mm]
TFT	TFT06040	Ø6 x 40	✓	6	7,5 - 9	TX30	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	10/--/--	60/66/78	30/33/39	90	45
	TFT06050	Ø6 x 50	✓			TX30								20/10/5				
	TFT06060	Ø6 x 60	✓			TX30								30/20/15				
TFP	TFP05040	Ø5 x 40(A)	✓*	5	6,5 - 8	TX30	8	35	35	25/30/40	30/40/45	30/40/45	20/22/26,5	10/--/--	60/66/80	30/33/40	80	80
	TFP05060	Ø5 x 60(B)	✓*			TX30								30/20/15				
	TFP06040	Ø6 x 40	✓	6	7,5 - 9	TX40	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	10/--/--	60/66/78	30/33/39	90	45
	TFP06050	Ø6 x 50	✓			TX40								20/10/5				
	TFP06060	Ø6 x 60	✓			TX40								30/20/15				
	TFP06080	Ø6 x 80	✓			TX40								50/40/35				
	TFP06100	Ø6 x 100	✓			TX40								70/60/55				
TFF	TFF05035S	Ø5 x 35 (M6)	✓*	5	6,5 - 8	SW10	8	35	35	25/30/40	30/40/45	30/40/45	20/22/26	--/--/--	60/66/80	30/33/40	80	80
	TFF06035	Ø6 x 35 (M8-M10)	✓	6	7,5 - 9	SW 13	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	--/--/--	60/66/78	30/33/39	90	45
	TFF06040	Ø6 x 40 (M8-M10)	✓															
	TFF06055	Ø6 x 55 (M8-M10)	✓															
TFM	TFM06035	Ø6 x 35 (M8)	✓	6	7,5 - 9	SW 13	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	--/--/--	60/66/78	30/33/39	90	45
	TFM06055	Ø6 x 55 (M10)	✓															
TFS	TFS06100	Ø6 x 100 (M8)	✓	6	7,5 - 9	SW 5	10	35	35	25/30/40	30/40/45	30/40/45	20/22/26	56/46/41	60/66/78	30/33/39	90	45
	TFS06120	Ø6 x 120 (M8)	✓											76/66/61				

*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

5. INSTALLATION PROCEDURE

5.1. CONCRETE AND HOLLOW CORE SLAB INSTALLATION

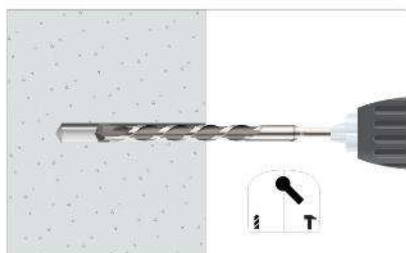


1. DRILLING

Check the concrete is well compacted and without significant porosity.
Suitable for dry, wet and flooded holes.
Use drill in hammer mode.
Drill according to specified depths in previous tables.



2.a) BLOW AND CLEAN


Clean the hole from dust and concrete remains.
Use blow pump and brush.

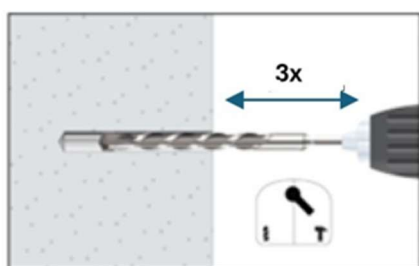

2. b) CLEAN WITH DRILL BIT


Alternatively, to 2.a):

- Upward installation direction: no cleaning is needed.
- Downward or horizontal installation direction: no cleaning is needed if drilling depth is h_1 , bit, and after the drilling process the drill bit is moved in and out of the hole for 3 times with both rotary and hammer modes of the drilling machine activated.

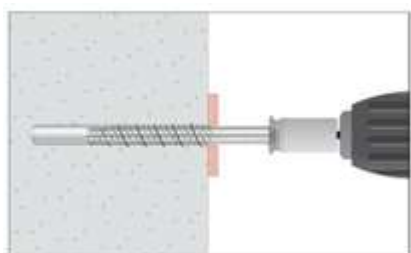

3. INSTALL


Select a powered impact wrench or a torque wrench that does not exceed the maximum torque indicated in previous tables.
Attach an appropriate size hex socket to the wrench.
Mount the screw anchor head in the socket.

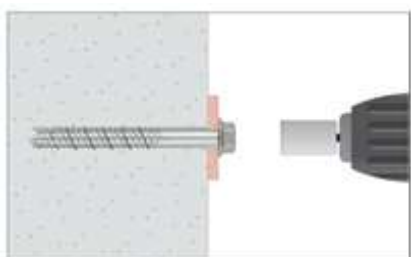

4. APPLY THE TORQUE

Drive the anchor with an impact driver or a torque wrench through the fixture and into the hole until the anchor head washer comes in contact with the fixture. The anchor must be snug after installation. Do not spin the hex socket off the anchor to disengage.

5.2. REUSABILITY IN TEMPORARY FIXINGS IN CONCRETE

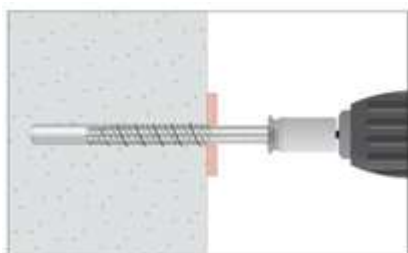


1. UNINSTALL

Use an impact wrench in reverse mode, ensuring that the torque does not exceed the maximum specified in the tables above.

Use the correct socket or bit for each size.

Uninstall the screw until it has been completely removed from the fastening element.

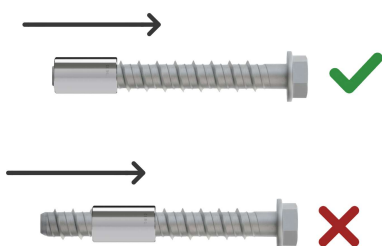


2. CHECK THE SCREW

Check the screw for visible damage and thread wear.

Use the reusability gauges for each specific diameter.

Maximum wear is indicated when, upon inserting the screw into its gauge, the tip of the thread does not protrude from the opposite end.

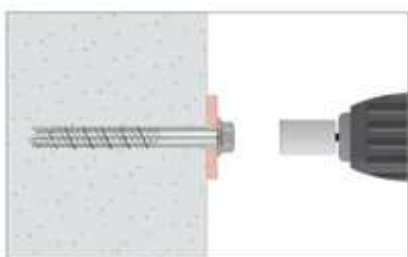

3. REINSTALLATION

Once the screw has been checked, reinstall it following the installation instructions set out in section 6.1 above.

The screw may only be reused in a new hole; do not reuse it in a hole where it has previously been installed.

6. RESISTANCES (CONCRETE)

The resistances stated below have been determined under the following conditions:

- The load values are only valid if the installation has been carried out correctly (see installation procedure) by qualified personnel
- Isolated anchor, with no edge effects ($c \geq 1.5 \times h_{ef}$) or anchor group effects ($s \geq 3.0 \times h_{ef}$). For further information, please refer to the relevant ETA.
- C20/25 Steel Fibre Reinforced Concrete (SFRC)
- Resistance for the ultimate limit state in accordance with EN 1992-4:2018 for static or quasi-static loads. With a partial installation factor for design resistances in accordance with the relevant ETA. With a partial safety factor of 1.4 included for the recommended maximum loads.
- In the event of a combination of tensile and shear loads, moments, anchor spacings or edge distances that are less than those indicated above, the calculation must be carried out in accordance with the information set out in the relevant ETA and in accordance with the calculation method laid down in EN 1992-4:2018. We recommend that you use the calculation program INDEXcal which is available free of charge on our website: www.indexfix.com
- For structures or installations subject to exposure to the elements and/or a permanently damp indoor environment, A4 stainless steel must be used.
- The values which are underlined and in italics indicate steel failure; values in bold indicate concrete failure, while the rest indicate extraction failure.

1 kN $\approx$ 100 kg

6.1 CHARACTERISTIC RESISTANCE (STRUCTURAL APPLICATION) [kN]

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
				($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
TFE	TFE05040	$\emptyset 5 \times 40$	✓*	--	6,71	--	6,71	--	4,70	--	4,70
	TFE05050	$\emptyset 5 \times 50$	✓*	10,19	6,71	<u><i>8,19</i></u>	6,71	7,13	4,70	7,13	4,70
	TFE05060	$\emptyset 5 \times 60$	✓*								
	TFE05080	$\emptyset 5 \times 80$	✓*								
	TFE05100	$\emptyset 5 \times 100$	✓*								
	TFE06035	$\emptyset 6 \times 35$	✓	--	5,00	--	<u><i>12,53</i></u>	--	4,57	--	9,36
	TFE06040	$\emptyset 6 \times 40$	✓	--		--		--		--	
	TFE06045	$\emptyset 6 \times 45$	✓	--		--		--		--	
	TFE06050	$\emptyset 6 \times 50$	✓	--		--		--		--	
	TFE06060	$\emptyset 6 \times 60$	✓	13,87	5,00	<u><i>12,53</i></u>	<u><i>12,53</i></u>	9,71	4,57	11,17	9,36
	TFE06070	$\emptyset 6 \times 70$	✓								
	TFE06080	$\emptyset 6 \times 80$	✓								
	TFE06100	$\emptyset 6 \times 100$	✓								
	TFE06120	$\emptyset 6 \times 120$	✓								
	TFE08055	$\emptyset 8 \times 55$	✓	--	11,30	--	<u><i>19,57</i></u>	--	7,91	--	14,23
	TFE08060	$\emptyset 8 \times 60$	✓	--		--		--		--	
	TFE08070	$\emptyset 8 \times 70$	✓	17,65	11,30	<u><i>19,57</i></u>	<u><i>19,57</i></u>	12,36	7,91	15,69	14,23
	TFE08075	$\emptyset 8 \times 75$	✓								
	TFE08080	$\emptyset 8 \times 80$	✓								
	TFE08090	$\emptyset 8 \times 90$	✓								
	TFE08100	$\emptyset 8 \times 100$	✓								
	TFE08110	$\emptyset 8 \times 110$	✓								
	TFE08120	$\emptyset 8 \times 120$	✓								
	TFE08140	$\emptyset 8 \times 140$	✓								
	TFE10060	$\emptyset 10 \times 60$	✓	--	13,15	--	25,65	--	9,21	--	17,95
	TFE10070	$\emptyset 10 \times 70$	✓	--		--		--		--	
	TFE10080	$\emptyset 10 \times 80$	✓	--		--		--		--	
	TFE10090	$\emptyset 10 \times 90$	✓	26,98	13,15	<u><i>27,40</i></u>	25,65	18,89	9,21	<u><i>27,40</i></u>	17,95
	TFE10100	$\emptyset 10 \times 100$	✓								
	TFE10120	$\emptyset 10 \times 120$	✓								
	TFE10140	$\emptyset 10 \times 140$	✓								
	TFE10160	$\emptyset 10 \times 160$	✓								
	TFE10180	$\emptyset 10 \times 180$	✓								
	TFE12080	$\emptyset 12 \times 80$	✓	--	21,73	--	<u><i>37,24</i></u>	--	15,21	--	35,44
	TFE12090	$\emptyset 12 \times 90$	✓	--		--		--		--	
	TFE12100	$\emptyset 12 \times 100$	✓	--		--		--		--	
	TFE12110	$\emptyset 12 \times 110$	✓	37,54	21,73	<u><i>37,24</i></u>	<u><i>37,24</i></u>	26,27	15,21	<u><i>37,24</i></u>	35,44
	TFE12130	$\emptyset 12 \times 130$	✓								
	TFE12150	$\emptyset 12 \times 150$	✓								

* $\emptyset 5$ Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
				($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
TFE	TFE14080	Ø14 x 80	✓	--		--		--		--	
	TFE14100	Ø14 x 100	✓	--	21,73	--	<u>52,72</u>	--	15,21	--	38,79
	TFE14110	Ø14 x 110	✓	--		--		--		--	
	TFE14120	Ø14 x 120	✓								
	TFE14130	Ø14 x 130	✓								
	TFE14140	Ø14 x 140	✓	43,41	21,73	<u>52,72</u>	<u>52,72</u>	30,39	15,21	<u>52,72</u>	38,79
	TFE14160	Ø14 x 160	✓								
	TFE16100	Ø16 x 100	✓	--	--	--	--	30,39	15,21	<u>52,72</u>	32,55
	TFE16150	Ø16 x 150	✓	43,41	21,73	<u>57,97</u>	46,50				
	TFE18100	Ø18 x 100	✓	--	28,50	--	75,82	--	19,95	--	53,07
	TFE18130	Ø18 x 130	✓	--		--		--		--	
	TFE18160	Ø18 x 160	✓								
	TFE18180	Ø18 x 180	✓	58,31	28,50	<u>80,78</u>	75,82	40,82	19,95	<u>80,78</u>	53,07
	TFE18200	Ø18 x 200	✓								
TFJ	TFJ06043	Ø6 x 43	✓	--	5,00	--	<u>12,53</u>	--	4,57	--	9,36
TFA	TFA05040	Ø5 x 40	✓*	--	6,71	--	6,71	--	4,70	--	4,70
	TFA05060	Ø5 x 60	✓*								
	TFA05080	Ø5 x 80	✓*	10,19	6,71	<u>8,19</u>	6,71	7,13	4,70	7,13	4,70
	TFA05100	Ø5 x 100	✓*								
	TFA06045	Ø6 x 45	✓	--	5,00	--	<u>12,53</u>	--	4,57	--	9,36
	TFA06050	Ø6 x 50	✓	--		--		--		--	
	TFA06060	Ø6 x 60	✓								
	TFA06080	Ø6 x 80	✓								
	TFA06100	Ø6 x 100	✓	13,87	5,00	<u>12,53</u>	<u>12,53</u>	9,71	4,57	11,17	9,36
	TFA06120	Ø6 x 120	✓								
	TFA06140	Ø6 x 140	✓								
	TFA08060	Ø8 x 60	✓	--	11,30	--	<u>19,57</u>	--	7,91	--	14,23
	TFA08080	Ø8 x 80	✓								
	TFA08100	Ø8 x 100	✓	17,65	11,30	<u>19,57</u>	<u>19,57</u>	12,36	7,91	15,69	14,23
	TFA08120	Ø8 x 120	✓								
	TFA10100	Ø10 x 100	✓								
	TFA10120	Ø10 x 120	✓	26,98	13,15	<u>27,40</u>	25,65	18,89	9,21	<u>27,40</u>	17,95
TFT	TFT06040	Ø6 x 40	✓	--	5,00	--	<u>12,53</u>	--	4,57	--	9,36
	TFT06050	Ø6 x 50	✓	--		--		--		--	
	TFT06060	Ø6 x 60	✓	13,87	5,00	<u>12,53</u>	<u>12,53</u>	9,71	4,57	11,17	9,36
TFP	TFP05040	Ø5 x 40	✓*	--	6,71	--	6,71	--	4,70	--	4,70
	TFP05060	Ø5 x 60	✓*	10,19	6,71	<u>8,19</u>	6,71	7,13	4,70	7,13	4,70
	TFP06040	Ø6 x 40	✓	--	5,00	--	<u>12,53</u>	9,71	4,57	--	9,36
	TFP06050	Ø6 x 50	✓	--		--		--		--	
	TFP06060	Ø6 x 60	✓								
	TFP06080	Ø6 x 80	✓	13,87	5,00	<u>12,53</u>	<u>12,53</u>	9,71	4,57	11,17	9,36
	TFP06100	Ø6 x 100	✓								
	TFP08060	Ø8 x 60	✓	--	11,30	--	<u>19,57</u>	--	7,91	--	14,23
	TFP08080	Ø8 x 80	✓	17,65	11,30	<u>19,57</u>	<u>19,57</u>	12,36	7,91	15,69	14,23
TFN	TFN14080	Ø14 x 80	✓	--	21,73	--	<u>52,72</u>	--	15,21	--	38,79
TFF	TFF05035S	Ø5 x 35 (M6)	✓*	--	6,71	--	--	--	4,70	--	--
	TFF06035	Ø6 x 35 (M8-M10)	✓								
	TFF06040	Ø6 x 40 (M8-M10)	✓	--	5,00	--	--	--	4,57	--	--
	TFF06055	Ø6 x 55 (M8-M10)	✓	13,87	--	--	--	9,71	--	--	--
	TFF08050T	Ø8 x 50 (M10)	✓								
	TFF08050W	Ø8 x 50 (M12)	✓	--	11,30	--	--	--	7,91	--	--
TFM	TFM06035	Ø6 x 35 (M8)	✓	--	5,00	--	--	--	4,57	--	--
	TFM06055	Ø6 x 55 (M10)	✓	13,87	--	--	--	9,71	--	--	--
TFS	TFS06100	Ø6 x 100 (M8)	✓	13,87	5,00	<u>12,53</u>	<u>12,53</u>	9,71	4,57	11,17	9,36
	TFS06120	Ø6 x 120 (M8)	✓								
	TFS08110	Ø8 x 110 (M10)	✓								
	TFS08130	Ø8 x 130 (M10)	✓	17,65	11,30	<u>19,57</u>	<u>19,57</u>	12,36	7,91	15,69	14,23
	TFS10120	Ø10 x 120 (M12)	✓								
	TFS10140	Ø10 x 140 (M12)	✓	22,01	13,15	<u>27,40</u>	25,65	15,41	9,21	20,34	17,95

6.2 DESIGN RESISTANCE (STRUCTURAL APPLICATION) [kN]

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rd, ucr}$		Shear $V_{Rd, ucr}$		Tension $N_{Rd, cr}$		Shear $V_{Rd, cr}$	
				($h_{ef, sta}$)	($h_{ef, red}$)	($h_{ef, sta}$)	($h_{ef, red}$)	($h_{ef, sta}$)	($h_{ef, red}$)	($h_{ef, sta}$)	($h_{ef, red}$)
TFE	TFE05040	Ø5 x 40	✓*	--	4,47	--	4,47	--	3,13	--	3,13
	TFE05050	Ø5 x 50	✓*	6,79	4,47	<u>5,46</u>	4,47	4,75	3,13	4,75	3,13
	TFE05060	Ø5 x 60	✓*								
	TFE05080	Ø5 x 80	✓*								
	TFE05100	Ø5 x 100	✓*								
	TFE06035	Ø6 x 35	✓	--	2,78	--	<u>8,35</u>	--	2,54	--	6,24
	TFE06040	Ø6 x 40	✓	--		--		--		--	
	TFE06045	Ø6 x 45	✓	--		--		--		--	
	TFE06050	Ø6 x 50	✓	--		--		--		--	
	TFE06060	Ø6 x 60	✓	9,25	2,78	<u>8,35</u>	<u>8,35</u>	6,47	2,54	7,44	6,24
	TFE06070	Ø6 x 70	✓								
	TFE06080	Ø6 x 80	✓								
	TFE06100	Ø6 x 100	✓								
	TFE06120	Ø6 x 120	✓	11,77	6,28	<u>13,05</u>	<u>13,05</u>	8,24	4,39	10,46	9,49
	TFE08055	Ø8 x 55	✓								
	TFE08060	Ø8 x 60	✓								
	TFE08070	Ø8 x 70	✓								
	TFE08075	Ø8 x 75	✓	11,77	6,28	<u>13,05</u>	<u>13,05</u>	8,24	4,39	10,46	9,49
	TFE08080	Ø8 x 80	✓								
	TFE08090	Ø8 x 90	✓								
	TFE08100	Ø8 x 100	✓								
	TFE08110	Ø8 x 110	✓	17,99	8,77	<u>18,27</u>	17,10	12,59	6,14	<u>18,27</u>	11,97
	TFE08120	Ø8 x 120	✓								
	TFE08140	Ø8 x 140	✓								
	TFE10060	Ø10 x 60	✓	--	8,77	--	17,10	--	6,14	--	11,97
	TFE10070	Ø10 x 70	✓	--		--		--		--	
	TFE10080	Ø10 x 80	✓	--		--		--		--	
	TFE10090	Ø10 x 90	✓	17,99	8,77	<u>18,27</u>	17,10	12,59	6,14	<u>18,27</u>	11,97
	TFE10100	Ø10 x 100	✓								
	TFE10120	Ø10 x 120	✓								
	TFE10140	Ø10 x 140	✓								
	TFE10160	Ø10 x 160	✓	25,02	14,49	<u>24,83</u>	<u>24,83</u>	17,52	10,14	<u>24,83</u>	23,63
	TFE10180	Ø10 x 180	✓								
	TFE12080	Ø12 x 80	✓	--	14,49	--	<u>24,83</u>	--	10,14	--	23,63
	TFE12090	Ø12 x 90	✓	--		--		--		--	
	TFE12100	Ø12 x 100	✓	--		--		--		--	
	TFE12110	Ø12 x 110	✓	25,02	14,49	<u>24,83</u>	<u>24,83</u>	17,52	10,14	<u>24,83</u>	23,63
	TFE12130	Ø12 x 130	✓								
	TFE12150	Ø12 x 150	✓								
	TFE14080	Ø14 x 80	✓	--	14,49	--	<u>35,15</u>	--	10,14	--	25,86
	TFE14100	Ø14 x 100	✓	--		--		--		--	
	TFE14110	Ø14 x 110	✓	--		--		--		--	
	TFE14120	Ø14 x 120	✓	28,94	14,49	<u>35,15</u>	<u>35,15</u>	20,26	10,14	<u>35,15</u>	25,86
	TFE14130	Ø14 x 130	✓								
	TFE14140	Ø14 x 140	✓								
	TFE14160	Ø14 x 160	✓								
	TFE16100	Ø16 x 100	✓	--	--	--	--	20,26	10,14	<u>38,65</u>	21,70
	TFE16150	Ø16 x 150	✓	28,94	14,49	<u>38,65</u>	31,00				
	TFE18100	Ø18 x 100	✓	--	19,00	--	50,54	--	13,30	--	35,38
	TFE18130	Ø18 x 130	✓	--		--		--		--	
	TFE18160	Ø18 x 160	✓	38,87	19,00	<u>53,85</u>	50,54	27,21	13,30	<u>53,85</u>	35,38
	TFE18180	Ø18 x 180	✓								
	TFE18200	Ø18 x 200	✓								
TFJ	TFJ06043	Ø6 x 43	✓	--	2,78	--	<u>8,35</u>	--	2,54	--	6,24

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rd, ucr}$		Shear $V_{Rd, ucr}$		Tension $N_{Rd, cr}$		Shear $V_{Rd, cr}$	
				($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
TFA	TFA05040	Ø5 x 40	✓*	--	4,47	--	4,47	--	3,13	--	3,13
	TFA05060	Ø5 x 60	✓*	6,79	4,47	5,46	4,47	4,75	3,13	4,75	3,13
	TFA05080	Ø5 x 80	✓*								
	TFA05100	Ø5 x 100	✓*								
	TFA06045	Ø6 x 45	✓	--	2,78	--	8,35	--	2,54	--	6,24
	TFA06050	Ø6 x 50	✓	--		--		--		--	
	TFA06060	Ø6 x 60	✓	9,25	2,78	8,35	8,35	6,47	2,54	7,44	6,24
	TFA06080	Ø6 x 80	✓								
	TFA06100	Ø6 x 100	✓								
	TFA06120	Ø6 x 120	✓								
	TFA06140	Ø6 x 140	✓								
	TFA08060	Ø8 x 60	✓	--	6,28	--	13,05	--	4,39	--	9,49
	TFA08080	Ø8 x 80	✓	11,77	6,28	13,05	13,05	8,24	4,39	10,46	9,49
	TFA08100	Ø8 x 100	✓								
	TFA08120	Ø8 x 120	✓								
	TFA10100	Ø10 x 100	✓	17,99	8,77	18,27	17,10	12,59	6,14	18,27	11,97
	TFA10120	Ø10 x 120	✓								
TFT	TFT06040	Ø6 x 40	✓	--	2,78	--	8,35	--	2,54	--	6,24
	TFT06050	Ø6 x 50	✓	--		--		--		--	
	TFT06060	Ø6 x 60	✓	9,25	2,78	8,35	8,35	6,47	2,54	7,44	6,24
TFP	TFP05040	Ø5 x 40	✓*	--	4,47	--	4,47	--	3,13	--	3,13
	TFP05060	Ø5 x 60	✓*	6,79	4,47	5,46	4,47	4,75	3,13	4,75	3,13
	TFP06040	Ø6 x 40	✓	--	2,78	--	8,35	--	2,54	--	6,24
	TFP06050	Ø6 x 50	✓	--		--		--		--	
	TFP06060	Ø6 x 60	✓	9,25	2,78	8,35	8,35	6,47	2,54	7,44	6,24
	TFP06080	Ø6 x 80	✓								
	TFP06100	Ø6 x 100	✓								
	TFP08060	Ø8 x 60	✓	--	6,28	--	13,05	--	4,39	--	9,49
	TFP08080	Ø8 x 80	✓	11,77	6,28	13,05	13,05	8,24	4,39	10,46	9,49
TFN	TFN14080	Ø14 x 80	✓	--	14,49	--	35,15	--	10,14	--	25,86
TFF	TFF05035S	Ø5 x 35 (M6)	✓*	--	4,47	--	--	--	3,13	--	--
	TFF06035	Ø6 x 35 (M8-M10)	✓	--	2,78	--	--	--	2,54	--	--
	TFF06040	Ø6 x 40 (M8-M10)	✓								
	TFF06055	Ø6 x 55 (M8-M10)	✓	9,25	--	--	--	6,47	--	--	--
	TFF08050T	Ø8 x 50 (M10)	✓	--	6,28	--	--	--	4,39	--	--
	TFF08050W	Ø8 x 50 (M12)	✓								
TFM	TFM06035	Ø6 x 35 (M8)	✓	--	2,78	--	--	--	2,54	--	--
	TFM06055	Ø6 x 55 (M10)	✓	9,25	--	--	--	6,47	--	--	--
TFS	TFS06100	Ø6 x 100 (M8)	✓	9,25	2,78	8,35	8,35	6,47	2,54	7,44	6,24
	TFS06120	Ø6 x 120 (M8)	✓								
	TFS08110	Ø8 x 110 (M10)	✓	11,77	6,28	13,05	13,05	8,24	4,39	10,46	9,49
	TFS08130	Ø8 x 130 (M10)	✓								
	TFS10120	Ø10 x 120 (M12)	✓	14,67	8,77	18,27	17,10	10,27	6,14	13,56	11,97
	TFS10140	Ø10 x 140 (M12)	✓								

*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

6.3 MAXIMUM RECOMMENDED LOADS (STRUCTURAL APPLICATION) [kN] (with $\gamma_F = 1.4$)

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{rec, ucr}$		Shear $V_{rec, ucr}$		Tension $N_{rec, cr}$		Shear $V_{rec, cr}$	
				($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
TFE	TFE05040	Ø5 x 40	✓*	--	3,20	--	3,20	--	2,24	--	2,24
	TFE05050	Ø5 x 50	✓*	4,85	3,20	<u>3,90</u>	3,20	3,40	2,24	3,40	2,24
	TFE05060	Ø5 x 60	✓*								
	TFE05080	Ø5 x 80	✓*								
	TFE05100	Ø5 x 100	✓*								
	TFE06035	Ø6 x 35	✓	--	1,98	--	<u>5,97</u>	--	1,81	--	4,46
	TFE06040	Ø6 x 40	✓	--		--		--		--	
	TFE06045	Ø6 x 45	✓	--		--		--		--	
	TFE06050	Ø6 x 50	✓	--		--		--		--	
	TFE06060	Ø6 x 60	✓	6,61	1,98	<u>5,97</u>	<u>5,97</u>	4,62	1,81	5,32	4,46
	TFE06070	Ø6 x 70	✓								
	TFE06080	Ø6 x 80	✓								
	TFE06100	Ø6 x 100	✓								
	TFE06120	Ø6 x 120	✓								
	TFE08055	Ø8 x 55	✓	--	4,48	--	<u>9,32</u>	--	3,14	--	6,78
	TFE08060	Ø8 x 60	✓	--		--		--		--	
	TFE08070	Ø8 x 70	✓	8,41	4,48	<u>9,32</u>	<u>9,32</u>	5,88	3,14	7,47	6,78
	TFE08075	Ø8 x 75	✓								
	TFE08080	Ø8 x 80	✓								
	TFE08090	Ø8 x 90	✓								
	TFE08100	Ø8 x 100	✓								
	TFE08110	Ø8 x 110	✓								
	TFE08120	Ø8 x 120	✓								
	TFE08140	Ø8 x 140	✓								
	TFE10060	Ø10 x 60	✓	--	6,26	--	12,21	--	4,38	--	8,55
	TFE10070	Ø10 x 70	✓	--		--		--		--	
	TFE10080	Ø10 x 80	✓	--		--		--		--	
	TFE10090	Ø10 x 90	✓	12,85	6,26	<u>13,05</u>	12,21	8,99	4,38	<u>13,05</u>	8,55
	TFE10100	Ø10 x 100	✓								
	TFE10120	Ø10 x 120	✓								
	TFE10140	Ø10 x 140	✓								
	TFE10160	Ø10 x 160	✓								
	TFE10180	Ø10 x 180	✓								
	TFE12080	Ø12 x 80	✓	--	10,35	--	<u>17,73</u>	--	7,24	--	16,88
	TFE12090	Ø12 x 90	✓	--		--		--		--	
	TFE12100	Ø12 x 100	✓	--		--		--		--	
	TFE12110	Ø12 x 110	✓	17,87	10,35	<u>17,73</u>	<u>17,73</u>	12,51	7,24	<u>17,73</u>	16,88
	TFE12130	Ø12 x 130	✓								
	TFE12150	Ø12 x 150	✓								
	TFE14080	Ø14 x 80	✓	--	10,35	--	<u>25,10</u>	--	7,24	--	18,47
	TFE14100	Ø14 x 100	✓	--		--		--		--	
	TFE14110	Ø14 x 110	✓	--		--		--		--	
	TFE14120	Ø14 x 120	✓	20,67	10,35	<u>25,10</u>	<u>25,10</u>	14,47	7,24	<u>25,10</u>	18,47
	TFE14130	Ø14 x 130	✓								
	TFE14140	Ø14 x 140	✓								
	TFE14160	Ø14 x 160	✓								
	TFE16100	Ø16 x 100	✓	--	--	--	--	14,47	7,24	<u>27,60</u>	15,50
	TFE16150	Ø16 x 150	✓	20,67	10,35	<u>27,60</u>	22,14				
	TFE18100	Ø18 x 100	✓	--	13,57	--	36,10	--	9,50	--	25,27
	TFE18130	Ø18 x 130	✓	--		--		--		--	
	TFE18160	Ø18 x 160	✓	27,77	13,57	<u>38,47</u>	36,10	19,44	9,50	<u>38,47</u>	25,27
	TFE18180	Ø18 x 180	✓								
	TFE18200	Ø18 x 200	✓								
TFJ	TFJ06043	Ø6 x 43	✓	--	1,98	--	<u>5,97</u>	--	1,81	--	4,46

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{rec, ucr}$		Shear $V_{rec, ucr}$		Tension $N_{rec, cr}$		Shear $V_{rec, cr}$	
				($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
TFA	TFA05040	Ø5 x 40	✓*	--	3,20	--	3,20	--	2,24	--	2,24
	TFA05060	Ø5 x 60	✓*	4,85	3,20	3,90	3,20	3,40	2,24	3,40	2,24
	TFA05080	Ø5 x 80	✓*								
	TFA05100	Ø5 x 100	✓*								
	TFA06045	Ø6 x 45	✓	--	1,98	--	5,97	--	1,81	--	4,46
	TFA06050	Ø6 x 50	✓	--		--		--		--	
	TFA06060	Ø6 x 60	✓	6,61	1,98	5,97	5,97	4,62	1,81	5,32	4,46
	TFA06080	Ø6 x 80	✓								
	TFA06100	Ø6 x 100	✓								
	TFA06120	Ø6 x 120	✓								
	TFA06140	Ø6 x 140	✓	8,41	4,48	9,32	9,32	5,88	3,14	7,47	6,78
	TFA08060	Ø8 x 60	✓								
	TFA08080	Ø8 x 80	✓								
	TFA08100	Ø8 x 100	✓								
TFT	TFT06040	Ø6 x 40	✓	--	1,98	--	5,97	--	1,81	--	4,46
	TFT06050	Ø6 x 50	✓	--		--		--		--	
	TFT06060	Ø6 x 60	✓	6,61	1,98	5,97	5,97	4,62	1,81	5,32	4,46
TFP	TFP05040	Ø5 x 40	✓*	--	3,20	--	3,20	--	2,24	--	2,24
	TFP05060	Ø5 x 60	✓*	4,85	3,20	3,90	3,20	3,40	2,24	3,40	2,24
	TFP06040	Ø6 x 40	✓	--	1,98	--	5,97	--	1,81	--	4,46
	TFP06050	Ø6 x 50	✓	--		--		--		--	
	TFP06060	Ø6 x 60	✓	6,61	1,98	5,97	5,97	4,62	1,81	5,32	4,46
	TFP06080	Ø6 x 80	✓								
	TFP06100	Ø6 x 100	✓								
	TFP08060	Ø8 x 60	✓	--	4,48	--	9,32	--	3,14	--	6,78
	TFP08080	Ø8 x 80	✓	8,41	4,48	9,32	9,32	5,88	3,14	7,47	6,78
TFN	TFN14080	Ø14 x 80	✓	--	10,35	--	25,10	--	7,24	--	18,47
TFF	TFF05035S	Ø5 x 35 (M6)	✓*	--	3,20	--	--	--	2,24	--	--
	TFF06035	Ø6 x 35 (M8-M10)	✓	--	1,98	--	--	--	1,81	--	--
	TFF06040	Ø6 x 40 (M8-M10)	✓								
	TFF06055	Ø6 x 55 (M8-M10)	✓	6,61	--	--	--	4,62	--	--	--
	TFF08050T	Ø8 x 50 (M10)	✓	--	4,48	--	9,32	--	3,14	--	--
	TFF08050W	Ø8 x 50 (M12)	✓								
TFM	TFM06035	Ø6 x 35 (M8)	✓	--	1,98	--	--	--	1,81	--	--
	TFM06055	Ø6 x 55 (M10)	✓	6,61	--	--	--	4,62	--	--	--
TFS	TFS06100	Ø6 x 100 (M8)	✓	6,61	1,98	5,97	5,97	4,62	1,81	5,32	4,46
	TFS06120	Ø6 x 120 (M8)	✓								
	TFS08110	Ø8 x 110 (M10)	✓	8,41	4,48	9,32	9,32	5,88	3,14	7,47	6,78
	TFS08130	Ø8 x 130 (M10)	✓								
	TFS10120	Ø10 x 120 (M12)	✓	10,48	6,26	13,05	12,21	7,34	4,38	9,68	8,55
	TFS10140	Ø10 x 140 (M12)	✓								

*Ø5 Assessed only for use in concrete and in precast prestressed hollow core slabs for redundant non-structural systems

PULL OUT INCREASING FACTOR FOR TENSION LOADS IN HIGH RESISTANCE CONCRETE ψ_c															
Diameter	Ø5		Ø6		Ø8		Ø10			Ø12		Ø14		Ø18	
Installation depth	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, 1}$)	($h_{ef, 2}$)	($h_{ef, 3}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)
C30/37	1,00	1,00	1,16	1,22	1,21	1,22	1,22	1,17	1,22	1,16	1,22	1,21	1,20	1,22	1,17
C40/50	1,00	1,00	1,28	1,41	1,39	1,41	1,41	1,30	1,41	1,29	1,41	1,39	1,37	1,40	1,32
C50/60	1,00	1,00	1,39	1,58	1,54	1,58	1,58	1,42	1,58	1,40	1,58	1,55	1,51	1,57	1,42

7. RESISTANCES (HOLLOW CORE SLABS)

The resistances stated below have been determined under the following conditions:

- The load values are only valid if the installation has been carried out correctly (see installation procedure) by qualified personnel
- Isolated anchor, with no edge effects ($c \geq 1.5 \times h_{ef}$) or anchor group effects ($s \geq 3.0 \times h_{ef}$). For further information, please refer to the relevant ETA.
- Hollow core slab class C30/37.
- Resistance for the ultimate limit state in accordance with EN 1992-4:2018 for static or quasi-static loads. With a partial installation factor for design resistances in accordance with the relevant ETA. With a partial safety factor of 1.4 included for the recommended maximum loads.
- In the event of a combination of tensile and shear loads, moments, anchor spacings or edge distances that are less than those indicated above, the calculation must be carried out in accordance with the information set out in the relevant ETA and in accordance with the calculation method laid down in EN 1992-4:2018. We recommend that you use the calculation program INDEXcal which is available free of charge on our website: www.indexfix.com
- For structures or installations subject to exposure to the elements and/or a permanently damp indoor environment, A4 stainless steel must be used.
- The values which are underlined and in italics indicate steel failure; values in bold indicate concrete failure, while the rest indicate extraction failure.

1 kN $\approx$ 100 kg

7.1 CHARACTERISTIC RESISTANCE (NON-STRUCTURAL APPLICATION) [kN]

General Parameter				Hollow core slabs						
Family	Code	Size	ETA Assessed	Tension N _{Rk}			Shear V _{Rk}			
				(h _{ef1})	(h _{ef2})	(h _{ef3})	(h _{ef1})	(h _{ef2})	(h _{ef3})	
TFE	TFE05040	Ø5 x 40	✓*	5,39	--	--	5,39	--	--	
	TFE05050	Ø5 x 50	✓*		6,22	8,22		6,22	8,19	
	TFE05060	Ø5 x 60	✓*							
	TFE05080	Ø5 x 80	✓*							
	TFE05100	Ø5 x 100	✓*							
	TFE06035	Ø6 x 35	✓	5,39	--	--	5,39	--	--	
	TFE06040	Ø6 x 40	✓		--	--		--	--	
	TFE06045	Ø6 x 45	✓		6,22	--		7,99	6,22	7,99
	TFE06050	Ø6 x 50	✓							
	TFE06060	Ø6 x 60	✓							
	TFE06070	Ø6 x 70	✓							
	TFE06080	Ø6 x 80	✓							
	TFE06100	Ø6 x 100	✓							
	TFE06120	Ø6 x 120	✓							
TFJ	TFJ06043	Ø6 x 43	✓	5,39	--	--	5,39	--	--	
TFA	TFA05040	Ø5 x 40	✓*	5,39	--	--	5,39	--	--	
	TFA05060	Ø5 x 60	✓*		6,22	8,22		6,22	8,19	
	TFA05080	Ø5 x 80	✓*							
	TFA05100	Ø5 x 100	✓*							
	TFA06045	Ø6 x 45	✓	5,39	--	6,22	5,39	--		
	TFA06050	Ø6 x 50	✓		--			--	--	
	TFA06060	Ø6 x 60	✓		6,22			7,99	7,99	
	TFA06080	Ø6 x 80	✓							
	TFA06100	Ø6 x 100	✓							
	TFA06120	Ø6 x 120	✓							
TFA06140	Ø6 x 140	✓								
THT	TFT06040	Ø6 x 40	✓	5,39	--	--	5,39	--	--	
	TFT06050	Ø6 x 50	✓		6,22	7,99		6,22	7,99	
	TFT06060	Ø6 x 60	✓							
THP	TFP05040	Ø5 x 40	✓*	5,39	--	--	5,39	--	--	
	TFP05060	Ø5 x 60	✓*		6,22	8,22		6,22	8,19	
	TFP06040	Ø6 x 40	✓	5,39			6,22			7,99
	TFP06050	Ø6 x 50	✓							
	TFP06060	Ø6 x 60	✓							
	TFP06080	Ø6 x 80	✓							
	TFP06100	Ø6 x 100	✓							

General Parameter				Hollow core slabs					
Family	Code	Size	ETA Assessed	Tension N_{Rd}			Shear V_{Rd}		
				(h_{ef1})	(h_{ef2})	(h_{ef3})	(h_{ef1})	(h_{ef2})	(h_{ef3})
TFF	TFF05035S	Ø5 x 35 (M6)	✓*	5,39	6,22	8,22	5,39	6,22	<u>8,19</u>
	TFF06035	Ø6 x 35 (M8-M10)	✓	5,39	6,22	7,99	5,39	6,22	7,99
	TFF06040	Ø6 x 40 (M8-M10)	✓						
	TFF06055	Ø6 x 55 (M8-M10)	✓						
TFM	TFM06035	Ø6 x 35 (M8)	✓	5,39	6,22	7,99	5,39	6,22	7,99
	TFM06055	Ø6 x 55 (M10)	✓						
TFS	TFS06100	Ø6 x 100 (M8)	✓	5,39	6,22	7,99	5,39	6,22	7,99
	TFS06120	Ø6 x 120 (M8)	✓						

Ø5 Homologado solamente para uso en hormigón y en losas alveolares prefabricadas para sistemas no-estructurales redundantes

7.2 DESIGN RESISTANCE (NON-STRUCTURAL APPLICATION) [kN]

General Parameter				Hollow core slabs						
Family	Code	Size	ETA Assessed	Tension N_{Rd}			Shear V_{Rd}			
				(h_{ef1})	(h_{ef2})	(h_{ef3})	(h_{ef1})	(h_{ef2})	(h_{ef3})	
TFE	TFE05040	Ø5 x 40	✓*	2,99	--	--	3,59	--	--	
	TFE05050	Ø5 x 50	✓*		3,45	4,57		4,14	5,46	
	TFE05060	Ø5 x 60	✓*							
	TFE05080	Ø5 x 80	✓*							
	TFE05100	Ø5 x 100	✓*	2,99			--			--
	TFE06035	Ø6 x 35	✓		--	--	--	--		
	TFE06040	Ø6 x 40	✓		--	--	--	--		
	TFE06045	Ø6 x 45	✓		3,45	--	4,44	4,14	5,33	
	TFE06050	Ø6 x 50	✓							
	TFE06060	Ø6 x 60	✓							
	TFE06070	Ø6 x 70	✓							
	TFE06080	Ø6 x 80	✓							
TFE06100	Ø6 x 100	✓								
TFE06120	Ø6 x 120	✓								
TFJ	TFJ06043	Ø6 x 43	✓	2,99	--	--	3,59	--	--	
TFA	TFA05040	Ø5 x 40	✓*	2,99	--	--	3,59	--	--	
	TFA05060	Ø5 x 60	✓*		3,45	4,57		4,14	5,46	
	TFA05080	Ø5 x 80	✓*							
	TFA05100	Ø5 x 100	✓*							
	TFA06045	Ø6 x 45	✓	2,99			--			3,59
	TFA06050	Ø6 x 50	✓		--	--				
	TFA06060	Ø6 x 60	✓		3,45	4,44	5,33			
	TFA06080	Ø6 x 80	✓							
	TFA06100	Ø6 x 100	✓							
	TFA06120	Ø6 x 120	✓							
TFA06140	Ø6 x 140	✓								
THT	TFT06040	Ø6 x 40	✓	2,99	--	--	3,59	--	--	
	TFT06050	Ø6 x 50	✓		3,45	4,44		4,14	5,33	
	TFT06060	Ø6 x 60	✓							
THP	TFP05040	Ø5 x 40	✓*	2,99	--	--	3,59	--	--	
	TFP05060	Ø5 x 60	✓*		3,45	4,57		4,14	5,46	
	TFP06040	Ø6 x 40	✓	2,99			--			3,59
	TFP06050	Ø6 x 50	✓							
	TFP06060	Ø6 x 60	✓							
	TFP06080	Ø6 x 80	✓							
	TFP06100	Ø6 x 100	✓							
TFF	TFF05035S	Ø5 x 35 (M6)	✓*	2,99	6,22	8,22	3,59	4,14	5,46	
	TFF06035	Ø6 x 35 (M8-M10)	✓	2,99	3,45	4,44	3,59	4,14	5,33	
	TFF06040	Ø6 x 40 (M8-M10)	✓							
	TFF06055	Ø6 x 55 (M8-M10)	✓							
TFM	TFM06035	Ø6 x 35 (M8)	✓	2,99	3,45	4,44	3,59	4,14	5,33	
	TFM06055	Ø6 x 55 (M10)	✓							
TFS	TFS06100	Ø6 x 100 (M8)	✓	2,99	3,45	4,44	3,59	4,14	5,33	
	TFS06120	Ø6 x 120 (M8)	✓							

Ø5 Homologado solamente para uso en hormigón y en losas alveolares prefabricadas para sistemas no-estructurales redundantes

7.3 MAXIMUM RECOMMENDED LOADS (NON-STRUCTURAL APPLICATION) [kN] (with $\gamma_F = 1.4$)

General Parameter				Hollow core slabs						
Family	Code	Size	ETA Assessed	Tension N_{rec}			Shear V_{rec}			
				(h_{ef1})	(h_{ef2})	(h_{ef3})	(h_{ef1})	(h_{ef2})	(h_{ef3})	
TFE	TFE05040	Ø5 x 40	✓*	2,14	--	--	2,57	--	--	
	TFE05050	Ø5 x 50	✓*		2,47	3,26		2,96	<u>3,90</u>	
	TFE05060	Ø5 x 60	✓*							
	TFE05080	Ø5 x 80	✓*							
	TFE05100	Ø5 x 100	✓*	2,14			--			--
	TFE06035	Ø6 x 35	✓		--	--	--	--		
	TFE06040	Ø6 x 40	✓		--	--	--	--		
	TFE06045	Ø6 x 45	✓		2,47	--	3,17	2,96	--	
	TFE06050	Ø6 x 50	✓			3,80				
	TFE06060	Ø6 x 60	✓							
	TFE06070	Ø6 x 70	✓							
	TFE06080	Ø6 x 80	✓		2,14		2,47	3,17	2,57	2,96
TFE06100	Ø6 x 100	✓								
TFE06120	Ø6 x 120	✓								
TFJ	TFJ06043	Ø6 x 43	✓	2,14		--				
TFA	TFA05040	Ø5 x 40	✓*	2,14	--	--	2,57	--	--	
	TFA05060	Ø5 x 60	✓*		2,47	3,26		2,96	<u>3,90</u>	
	TFA05080	Ø5 x 80	✓*							
	TFA05100	Ø5 x 100	✓*							
	TFA06045	Ø6 x 45	✓	2,14			--			2,57
	TFA06050	Ø6 x 50	✓		--	--				
	TFA06060	Ø6 x 60	✓		2,47	3,17	3,80			
	TFA06080	Ø6 x 80	✓							
	TFA06100	Ø6 x 100	✓							
	TFA06120	Ø6 x 120	✓							
	TFA06140	Ø6 x 140	✓							
THT	TFT06040	Ø6 x 40	✓	2,14	--	--	2,57	--	--	
	TFT06050	Ø6 x 50	✓		2,47	3,17		2,96	3,80	
	TFT06060	Ø6 x 60	✓							
THP	TFP05040	Ø5 x 40	✓*	2,14	--	--	2,57	--	--	
	TFP05060	Ø5 x 60	✓*		2,47	3,26		2,96	<u>3,90</u>	
	TFP06040	Ø6 x 40	✓	2,14			--			--
	TFP06050	Ø6 x 50	✓		2,47	3,17	2,57	2,96	3,80	
	TFP06060	Ø6 x 60	✓							
	TFP06080	Ø6 x 80	✓							
	TFP06100	Ø6 x 100	✓							
TFF	TFF05035S	Ø5 x 35 (M6)	✓*	2,14						2,47
	TFF06035	Ø6 x 35 (M8-M10)	✓	2,14	2,47	3,17	2,57	2,96	3,80	
	TFF06040	Ø6 x 40 (M8-M10)	✓							
	TFF06055	Ø6 x 55 (M8-M10)	✓							
TFM	TFM06035	Ø6 x 35 (M8)	✓	2,14	2,47	3,17	2,57	2,96	3,80	
	TFM06055	Ø6 x 55 (M10)	✓							
TFS	TFS06100	Ø6 x 100 (M8)	✓	2,14	2,47	3,17	2,57	2,96	3,80	
	TFS06120	Ø6 x 120 (M8)	✓							

Ø5 Homologado solamente para uso en hormigón y en losas alveolares prefabricadas para sistemas no-estructurales redundantes

8. OFFICIAL DOCUMENTATION

The following documents are available on our official website www.indexfix.com:

- European assessment ETA 20/0046 for Installation in cracked and non-cracked concrete according to guideline EAD 330232-02-0601, option 1, from Ø6 to Ø18.
- European assessment ETA 20/0494 for use in concrete and prestressed hollow core slabs for redundant non-structural systems according to guideline EAD 330747-00-0601 from Ø5 to Ø6.
- Declaration of performance DoP THE.
- VdS certificate CEA 4001:2021-01(07) *Guidelines for sprinklers systems. Planning and installation for applications of water extinguishing systems on concrete elements* from Ø8 to Ø18.
- Technical Suitability Document DIT plus n° 708p/26: Reusable concrete screw for fixing temporary elements in concrete from Ø8 to Ø14
- Available in the anchor design software INDEXcal.